NAVAL POSTGRADUATE SCHOOL
Monterey, California

THESIS

CERENKOV RADIATION GENERATED BY PERIODIC ELECTRON BUNCHES IN A FINITE AIR PATH

by

Lawrence A. Newton

December 1983

Thesis Advisor: F. R. Buskirk

Approved for public release; distribution unlimited

T215657

REPORT DOCUMENTATION PAGE

READ INSTRUCTIONS BEFORE COMPLETING FORM

1. REPORT NUMBER	2. GOVT ACCESSION NO. / 3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle): Cerenkov Radiation Generated by Periodic Electron Bunches in a Finite Air Path	5. TYPE OF REPORT & PERIOD COVERED: Master's Thesis, December 1983
	6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s): Lawrence A. Newton	8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS: Naval Postgraduate School, Monterey, California 93943	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
11. CONTROLLING OFFICE NAME AND ADDRESS: Naval Postgraduate School, Monterey, California 93943	12. REPORT DATE: December 1983
	13. NUMBER OF PAGES: 62
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)	15. SECURITY CLASS. (of this report): Unclassified
	15a. DECLASSIFICATION/DOWNGRADING SCHEDULE

16. DISTRIBUTION STATEMENT (of this Report)

Approved for public release; distribution unlimited

17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)

18. SUPPLEMENTARY NOTES

19. KEY WORDS (Continue on reverse side if necessary and identify by block number)

Cerenkov radiation
electron beams

20. ABSTRACT (Continue on reverse side if necessary and identify by block number)

Microwave Cerenkov radiation is measured for the case of bunched electron beams which exceed the velocity of light in a finite air path. The theoretical equation for prediction of the form of the power for Cerenkov radiation is tested experimentally for this case. Initial verification of the theory is observed.

Approved for public release; distribution unlimited.

Cerenkov Radiation Generated by Periodic Electron Bunches in a Finite Air Path

by

Lawrence A. Newton
Lieutenant, United States Navy
B.A., University of California, San Diego, 1974
M.B.A., San Diego State University, 1978

Submitted in partial fulfillment of the
requirements for the degree of

MASTER OF SCIENCE IN PHYSICS

from the

NAVAL POSTGRADUATE SCHOOL
December 1983

MONTEREY, CALIFORNIA 93943

ABSTRACT

Microwave Cerenkov radiation is measured for the case of bunched electron beams which exceed the velocity of light in a finite air path. The theoretical equation for prediction of the form of the power for Cerenkov radiation is tested experimentally for this case. Initial verification of the theory is observed.

TABLE OF CONTENTS

I. INTRODUCTION 7

II. EXPERIMENT 14

A. BASIC EXPERIMENTAL DESIGN 14

B. EXPERIMENTAL APPARATUS 15

1. LINAC 16

2. Air Path 16

3. Mirror 17

4. End Station Detection Apparatus 17

5. Cable 21

6. Observer Station 21

III. RESULTS 25

A. METHOD OF DATA REDUCTION 25

B. DATA 25

C. CONCLUSIONS 32

APPENDIX A: FORTRAN PROGRAM FOR CALCULATING CERENKOV RADIATION CURVES 35

APPENDIX B: FORTRAN PROGRAM - CERENKOV CURVES WITH DATA POINTS 40

APPENDIX C: FORTRAN PROGRAM - SUM OF CERENKOV CURVES WITH DATA POINTS 46

APPENDIX D: EXPERIMENTAL APPARATUS 52

APPENDIX E: TABULAR DATA FOR FIGURES 56

LIST OF REFERENCES 61

INITIAL DISTRIBUTION LIST 62

LIST OF TABLES

I. Variable Definitions 10
II. LINAC Parameters 16
III. Tabular Data for Figure 3.1 56
IV. Tabular Data for Figure 3.2 57
V. Tabular Data for Figure 3.3 58
VI. Tabular Data for Figure 3.4 59
VII. Tabular Data for Figure 3.5 60

LIST OF FIGURES

1.1	Cerenkov Radiation	8
1.2	Third Harmonic for L = 0.7,0.9,1.5 meters . . .	12
1.3	Harmonics 3,5,7 for L = 1.0 meters	13
2.1	Experimental Design	15
2.2	Antenna Beam Profile for the Electric Field . .	19
2.3	Antenna Beam Profile for the Magnetic Field . .	20
2.4	Filter Band-pass for the Third Harmonic	22
2.5	Filter Bandpass for the Fourth Harmonic	23
3.1	Harmonic=3 : L=1.0 m: Filter = 3rd	27
3.2	Harmonic=4 : L = 1.0 m : Filter=4th	28
3.3	Harmonics= 3-7 : L = 1.0 m : Filter = Waveguide	29
3.4	Harmonics= 3 + 4 : L=1.0 m : Filter = Waveguide	32
3.5	Harmonics= 3 + 6 : L=1.0 m : Filter = 3rd . . .	33
D.1	LINAC End-Station	53
D.2	Detection Apparatus Components	54
D.3	Assembled Detection Apparatus	55

I. INTRODUCTION

Since the speed of light is modified by the index of refraction in a dielectric, it is possible for relativistic electrons to have a velocity which actually exceeds that of light in the medium. In this circumstance a phenomenon known as Cerenkov radiation arises. This radiation appears in a cone, around the direction of motion of the electrons, defined by the Cerenkov angle.

$$\theta_c = \cos^{-1} (c/nv), \qquad \text{(eqn 1.1)}$$

where c is the speed of light in a vacuum, n is the index of refraction, and v is the velocity of the electrons. This radiation is analogous to acoustic shock waves in air.

F. R. Buskirk and J. R. Neighbours [Ref. 1] calculated the power of Cerenkov radiation for the case where the electrons are bunched and the dielectric medium is of finite length. The experiments described in this thesis were designed to check those theoretical calculations.

Figure 1.1 depicts the pertinent physical relationships for this situation. See Table I for definitions of the variables. The first step in the theoretical derivation was to calculate the vector potential $\underline{A}$ and the scalar potential, ϕ, at a field point $\underline{r}$ resulting from an element of charge at a location within the electron bunch. A key factor in the analysis is that the current and charge densities which appear in the expressions for the potentials are periodic and may be expressed as Fourier series. Therefore, the potentials themselves may also be expressed as Fourier series, with Fourier coefficients representing the frequency components.

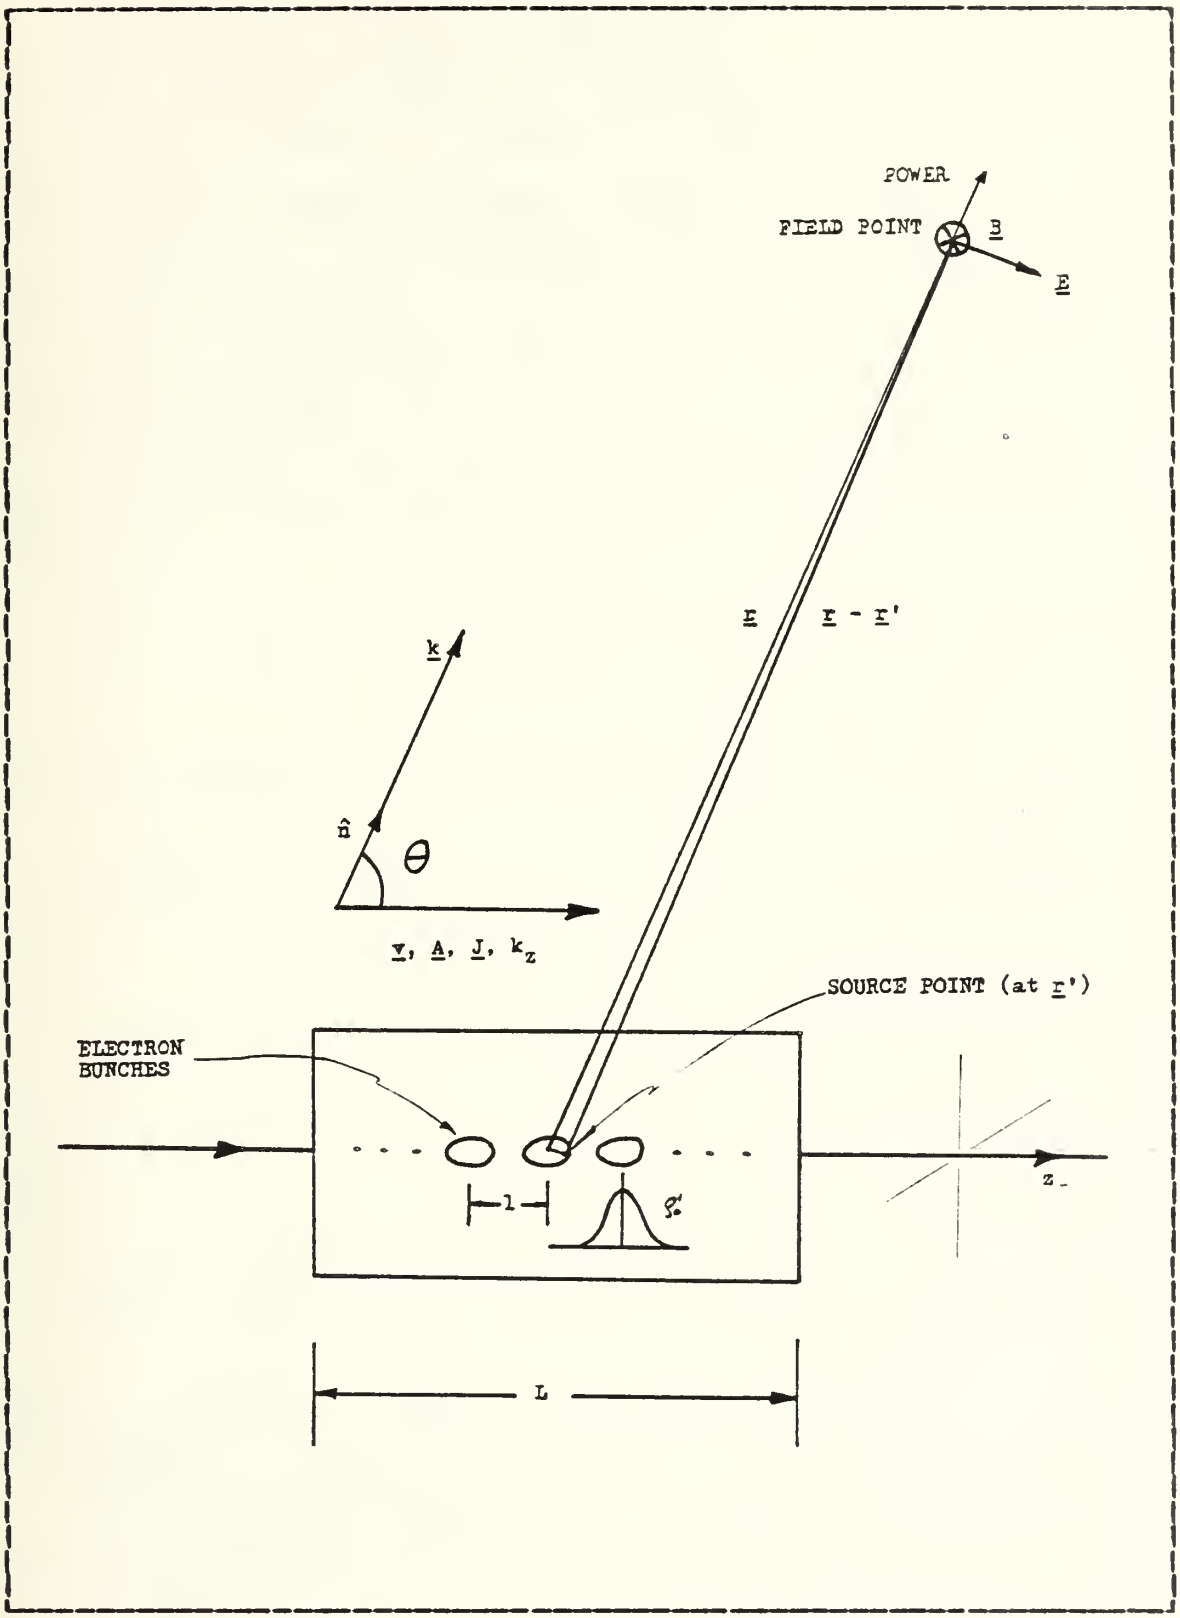

Figure 1.1 Cerenkov Radiation.

It is convenient to carry out the rest of the analysis in terms of the Fourier coefficients. The electric and magnetic field components are obtained from the potentials, and these, in turn, are used to find the frequency components of the average radiated power. An important assumption inherent in the procedure, which may directly affect experimental validity, is that the field point is assumed to be far from the source region. For details of the entire analysis, see [Ref. 2].

A principal result of [Ref. 2] is slightly recast in [Ref. 3] as the following expression for the power per unit solid angle at a given frequency,

$$W(\nu,n) = \frac{\mu}{2c} L^2 \nu^2 \nu_o^2 \sin^2\theta \left|\underset{\sim}{\rho}_o'(\underline{k})\right|^2 I^2(u) , \qquad \text{(eqn 1.2)}$$

with the parameters defined as follows:

$$u = \frac{kL}{2} (\cos\theta_c - \cos\theta) , \qquad \text{(eqn 1.3)}$$

$$I(u) = \frac{\sin u}{u} , \qquad \text{(eqn 1.4)}$$

and

$$\underset{\sim}{\rho}_o'(\underline{k}) = \int_{-\infty}^{\infty}\int\int d^3r\, e^{-i\underline{k}\cdot\underline{r}}\, \underset{\sim}{\rho}_o'(\underline{k}) . \qquad \text{(eqn 1.5)}$$

Refer to figure 1.1 and table I for clarification of these parameters.

The frequencies appearing in equation 1.2 are harmonics of the electron bunch frequency, which is a constant (ν_o). Thus, writing (ν) as ($j\nu_o$), and using a one-dimensional

TABLE I

Variable Definitions

$\underline{J} = \rho \underline{v}$	=	current density
$l = \underline{v}/\nu_o$	=	bunch spacing
ν_o	=	bunch frequency
$\underline{v}$	=	bunch velocity
$\underline{k}$	=	power propagation direction
n	=	unit vector in the $\underline{k}$ direction
L	=	length of finite emission region
$\underline{A}$	=	vector potential
$\underline{r}$	=	position vector of field point
$\underline{r}'$	=	position vector of source point
ρ_o'	=	Gaussian distribution of longitudinal bunch (charge) distribution
b	=	parameter for the charge distribution
$\underline{E}$	=	electric field vector
$\underline{B}$	=	magnetic field vector

Gaussian distribution to describe the longitudinal bunch dimension, a relatively simple Cerenkov radiation power function is given by equation 1.6 (equations 9 and 10 of [Ref. 3]). This is the expression which was used to compare theoretical to experimental results.

$$P_j(\theta) = \frac{2\mu\nu_o^4 q^2}{c} \frac{j^2}{4} L^2 \sin^2\theta \left(\frac{\sin u}{u}\right)^2 \text{Exp}\left(\frac{-k_z^2 b^2}{2}\right), \text{(eqn 1.6)}$$

Note that the radiation function varies with the square of the harmonic number, the length L of the emission region, and the angle at which the radiation is being observed. Note also the interference factor, similar to what might be experienced with optical radiation, and the way in which the bunch dimension, b, appears in the expression. The length of the emission region and the angle appear not only directly, but also through the factor u (see equation 1.3).

The results of this simple equation are quite interesting. Due to the finite size of the emission region, radiation no longer appears only at the Cerenkov angle, but throughout a range of angles determined by the (sin u)/u factor. Figure 1.2 shows how the radiation is spread for three different sizes of emission region. For a given harmonic, smaller emission regions cause greater spread, or diffraction of the radiation. The power is distributed to varying degrees among the different harmonics also, as depicted by figure 1.3. Higher harmonics have larger peak powers, and are peaked at a smaller angle than are lower harmonics.

For this experiment, the microwave portion of the spectrum was investigated, and the dielectric medium for the electron path was chosen to be air. The electrons were accelerated to relativistic velocities by the Naval Postgraduate School LINAC, which produces electrons with energies of approximately 100 Mev. For the theoretical calculations, a Fortran program (see appendix A) was used to calculate the power as a function of angle from equation 1.6. Variants of this program (appendices B and C) were used to superimpose data points over the theoretical curves.

The experimental apparatus and procedures are described in detail in the next chapter.

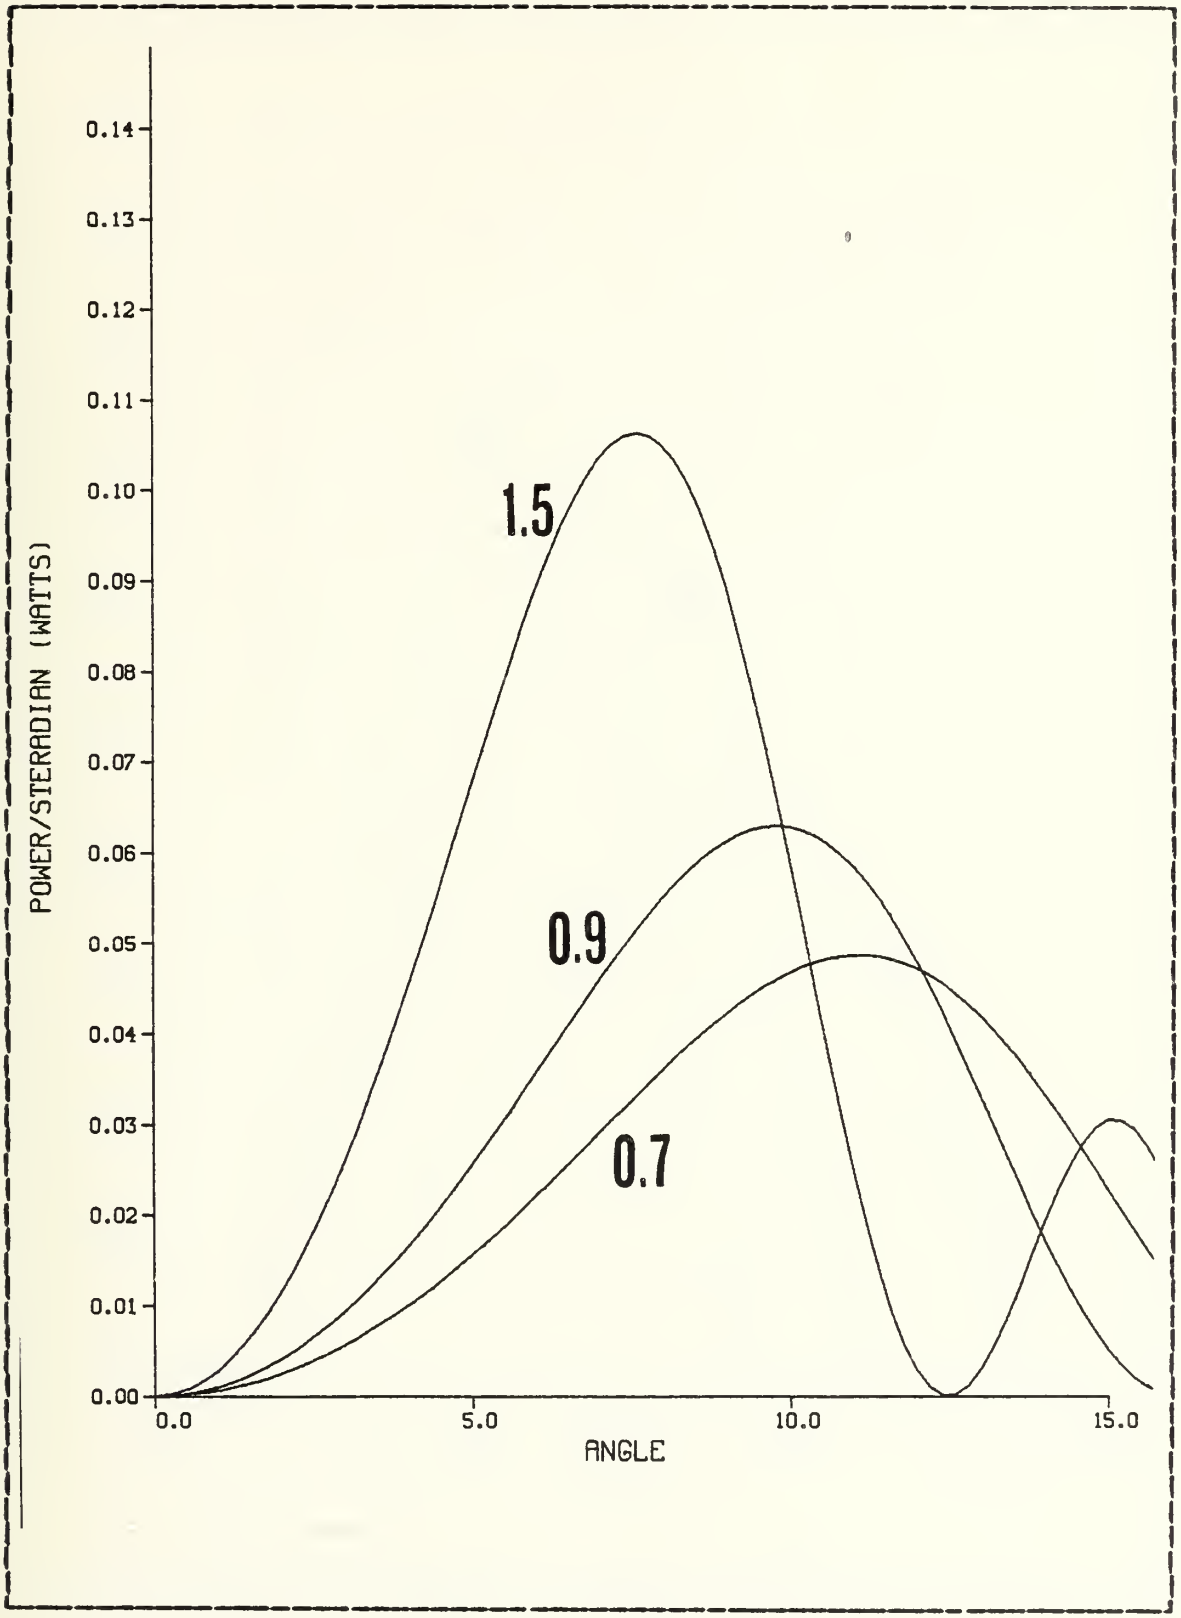

Figure 1.2 Third Harmonic for L = 0.7,0.9,1.5 meters.

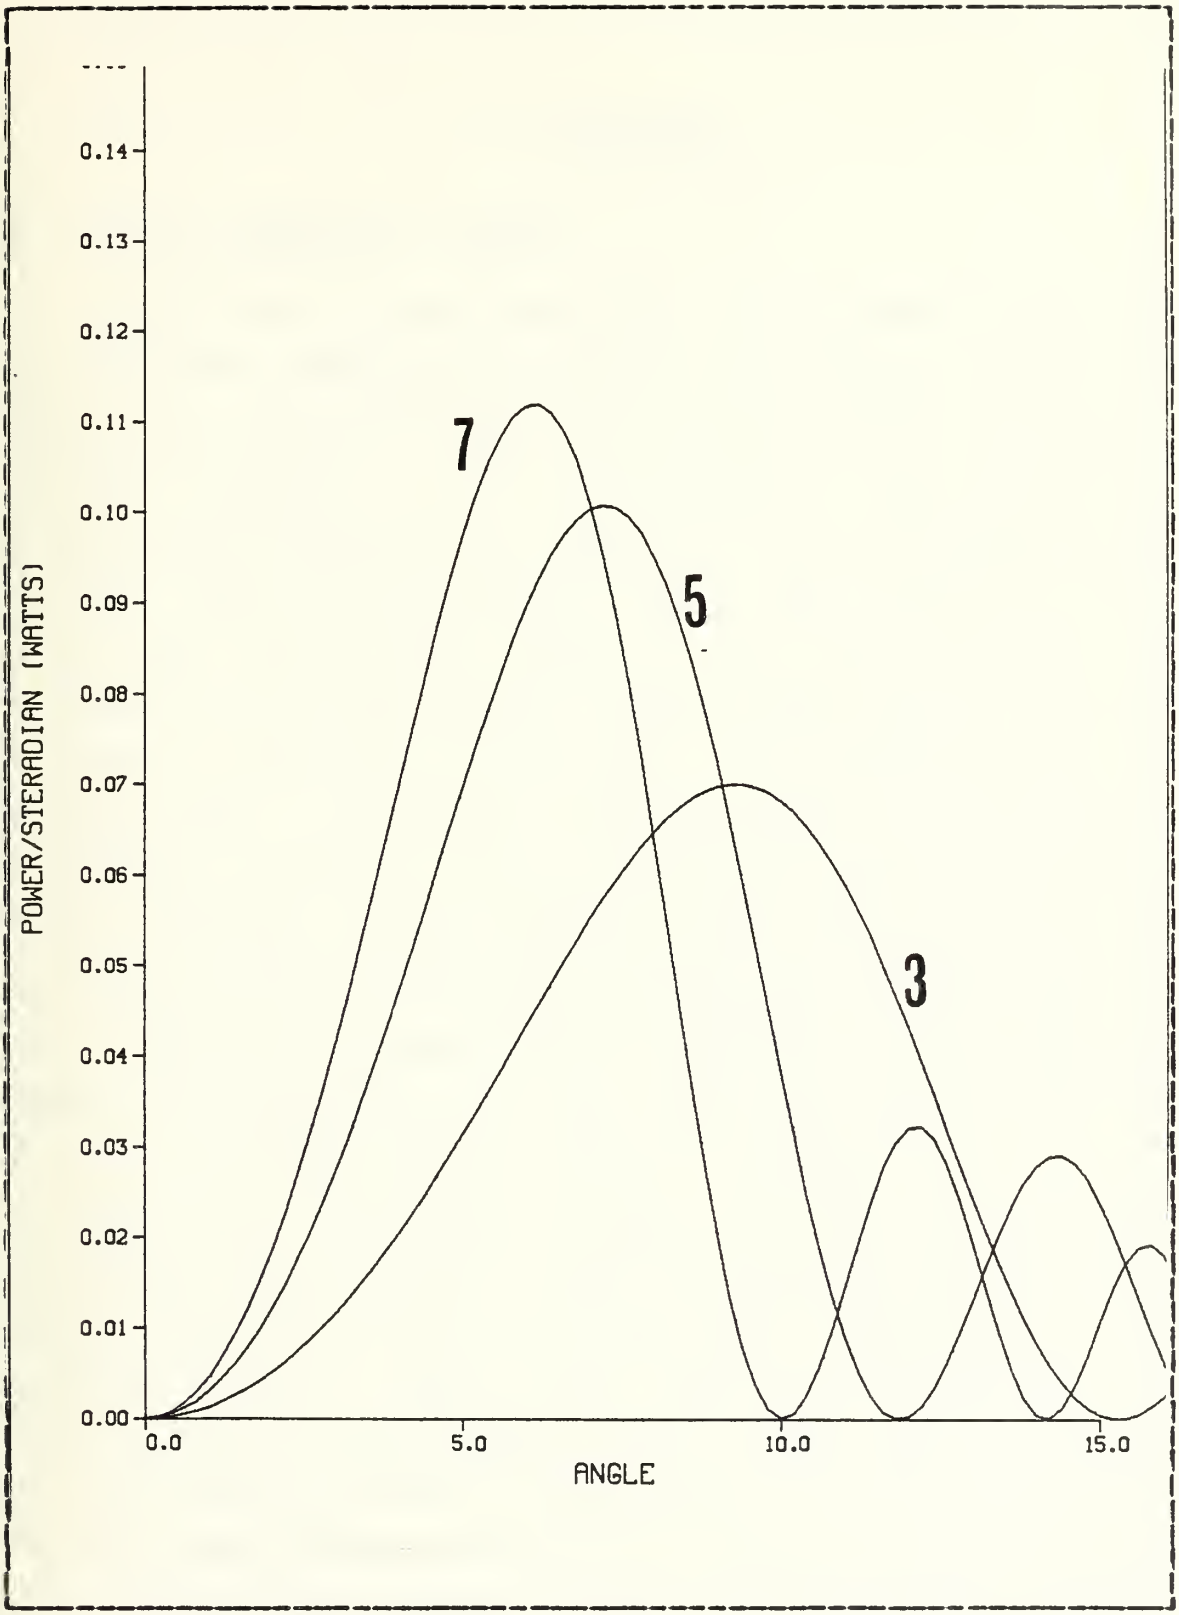

Figure 1.3 Harmonics 3,5,7 for L = 1.0 meters.

II. EXPERIMENT

A. BASIC EXPERIMENTAL DESIGN

The purpose of this experiment was to measure the power from Cerenkov radiation as a function of angle, in order to compare it with theoretical curves such as those depicted in figures 1.2 and 1.3. The basic design for this experiment is shown in figure 2.1. Photographs of the experimental apparatus are presented in Appendix D. The electron bunches exit the Linac aperture and emit Cerenkov radiation until they reach the aluminum mirror. This mirror allows the electrons to pass and proceed into the beam dump, while the microwave radiation of interest is reflected into the detector area. The mirror therefore performs the function, required by theory, that the radiation be emitted over a finite distance. The detector is mounted on a pivot arm, which is placed such that the detector is always pointed at the virtual center of the emission region. The pivot arm also fixes the distance from the center of the emission region to the detector, so that the distance over which the radiation travels is eliminated as a variable.

With this experimental setup, the basic experimental procedure was to sweep the detector over the angular range of interest using a small motor in the detector mount. The signal picked up by the detector was transmitted to the observer station, where it was fed into an amplifier and then into both an oscilloscope and a pulse height analyzer. The oscilloscope allowed a gross measure of power, while the frequency distribution measured by the pulse height analyzer gave a more precise value. The end result of this procedure was tabular data in the form of signal versus angle.

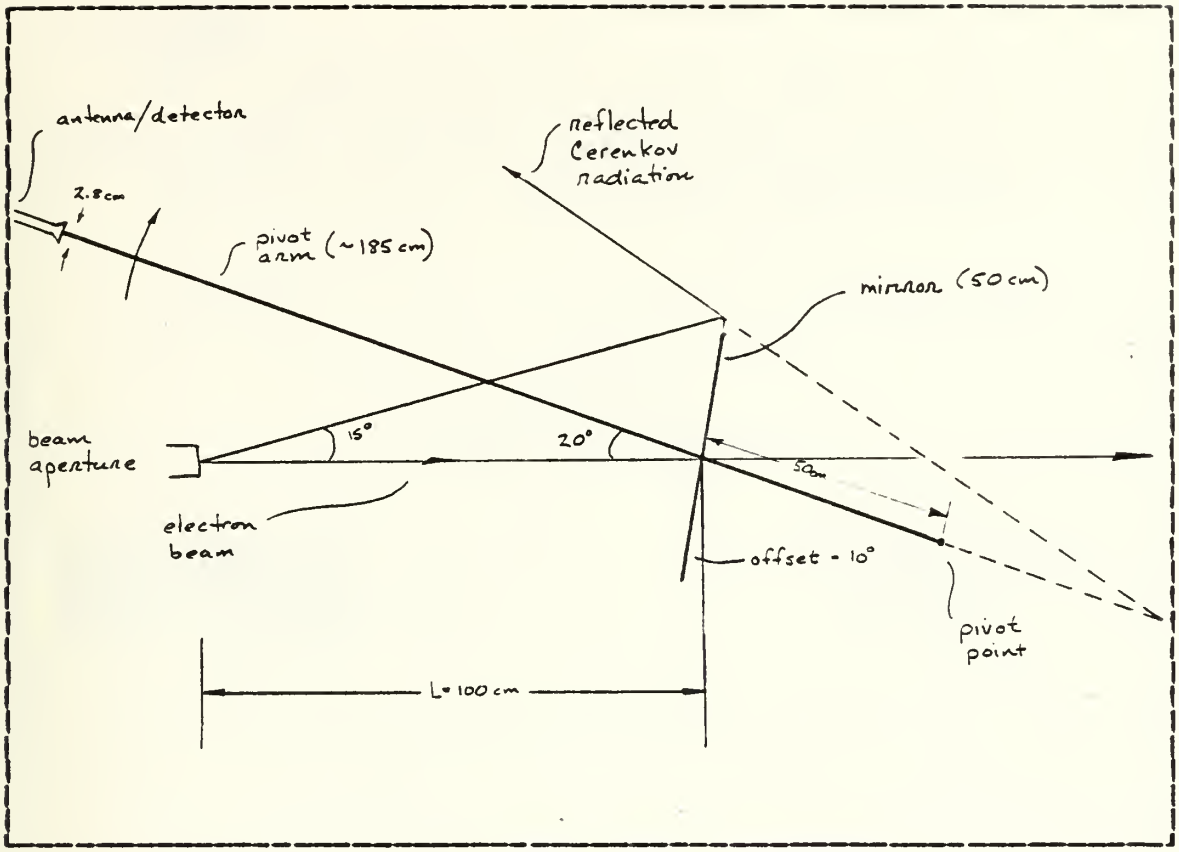

Figure 2.1 Experimental Design.

This brief overview of the experimental design is amplified in the next section with a more detailed look at various elements of the experimental apparatus.

B. EXPERIMENTAL APPARATUS

In this section, the components of the experimental apparatus will be examined, in order to provide a precise understanding of the experiment. The various components of the signal train will be reviewed in order, from the originating device itself (LINAC) to the final detection and analysis components.

1. LINAC

The salient features of the LINAC are listed in table II. These parameters are the same as those calculated by A. Saglam in prior thesis work with the LINAC at the

TABLE II

LINAC Parameters

Bunch Frequency:	2.856 GHz
Bunch Velocity:	2.997886E08 m/s
Bunch Size Parameter:	0.24 cm
Electron Energy:	100 Mev
Bunch Spacing:	10.5 cm

Naval Postgraduate School [Ref. 4]. These parameters also meet those chosen in [Ref. 3] which gives the theoretical curves for Cerenkov radiation. The LINAC provided fairly consistent signals for the experiments which are reported here. However, the signal eventually developed instabilities which precluded further experiments. That is, it became impossible to distinguish between signal variation due to the LINAC and that due to variation in the angle of detection. It may be that some of the experimental deviation from theory can be adequately explained by the variability of the LINAC itself.

2. Air Path

The air path was chosen to be 1.0 meter in length, which was convenient for the dimensions of the LINAC end station. The characteristic index of refraction for air was taken to be 1.000268, which is the same as that given for

air in [Ref. 3]. This gives a speed of light in air of 2.997127E08 meters per second, which is less than the velocity of 100 Mev electrons (see Table II).

3. Mirror

A polished aluminum mirror 50 centimeters in length was used to fix the path length. The mirror performed the dual function of allowing the electron bunches to pass and proceed into the beam dump, while causing the microwave Cerenkov radiation to be reflected into the detection area. The electron bunches continued to emit Cerenkov radiation after passing through the mirror. It was assumed that this radiation did not reach the detection area, due to the inherent weakness of the signal, and due to the distance and multiple reflections it would have to travel through in order to reach the detection area.

The mirror was tilted 10 degrees, causing the reflection axis to be offset 20 degrees from the beam axis. Therefore, the actual length of the emission region varied between approximately 95 and 105 centimeters. Measurements were made over a range of from 0 to 15 degrees. The mirror was long enough to reflect most, but not all, of the radiation at 15 degrees. See figure 2.1 for details of the geometry of the experiment.

4. End Station Detection Apparatus

The detection apparatus was mounted at the end of a pivot arm of fixed length. The pivot point was located at the center of the virtual image projected by the mirror, in order for the detector to always be pointed at the virtual center of the emission region. Theory assumed that the emission region would be a short distance, small compared to the detector distance $\underline{r}'$ (field point). Focusing the detector on the center of the emission region was done to

approximate theory as closely as possible. The pivot arm also kept the detector at a fixed distance from the (virtual) center of the emission region. Therefore, the distance of travel of the measured radiation was approximately the same for all angles, so that variation in distance would have minimal effect on the signal variation.

a. Antenna

A small antenna, with a lateral dimension of 2.8 centimeters, served as the forward end of the detection apparatus. This antenna served two functions. First, it was small enough that, with the given length of the pivot arm, the antenna subtended an arc length of approximately 1 degree. Therefore, an experimental measurement resolution of 1 degree was obtained. Further, this antenna had a very wide beam width. The antenna profiles for the electric and magnetic fields are given in figures 2.2 and 2.3. Using the half-power points as cutoffs, the beam width is found to be greater than 60 degrees for both the E and H fields, and thus for the power as well. At a distance equal to the average of that between the antenna and the mirror, approximately 130 centimeters, the beamwidth covers an arc length of 68 centimeters, which is larger than the length of the mirror.

Therefore, radiation arriving at the antenna and originating from any part of the emission region would be collected by the antenna. This again approximates the theoretical condition that the emission region be a point source, since the antenna "sees" the entire emission region at every angle of interest.

In summary, the antenna's narrow dimensions have provided spatial resolution, while its wide beamwidth has approximated a theoretical requirement.

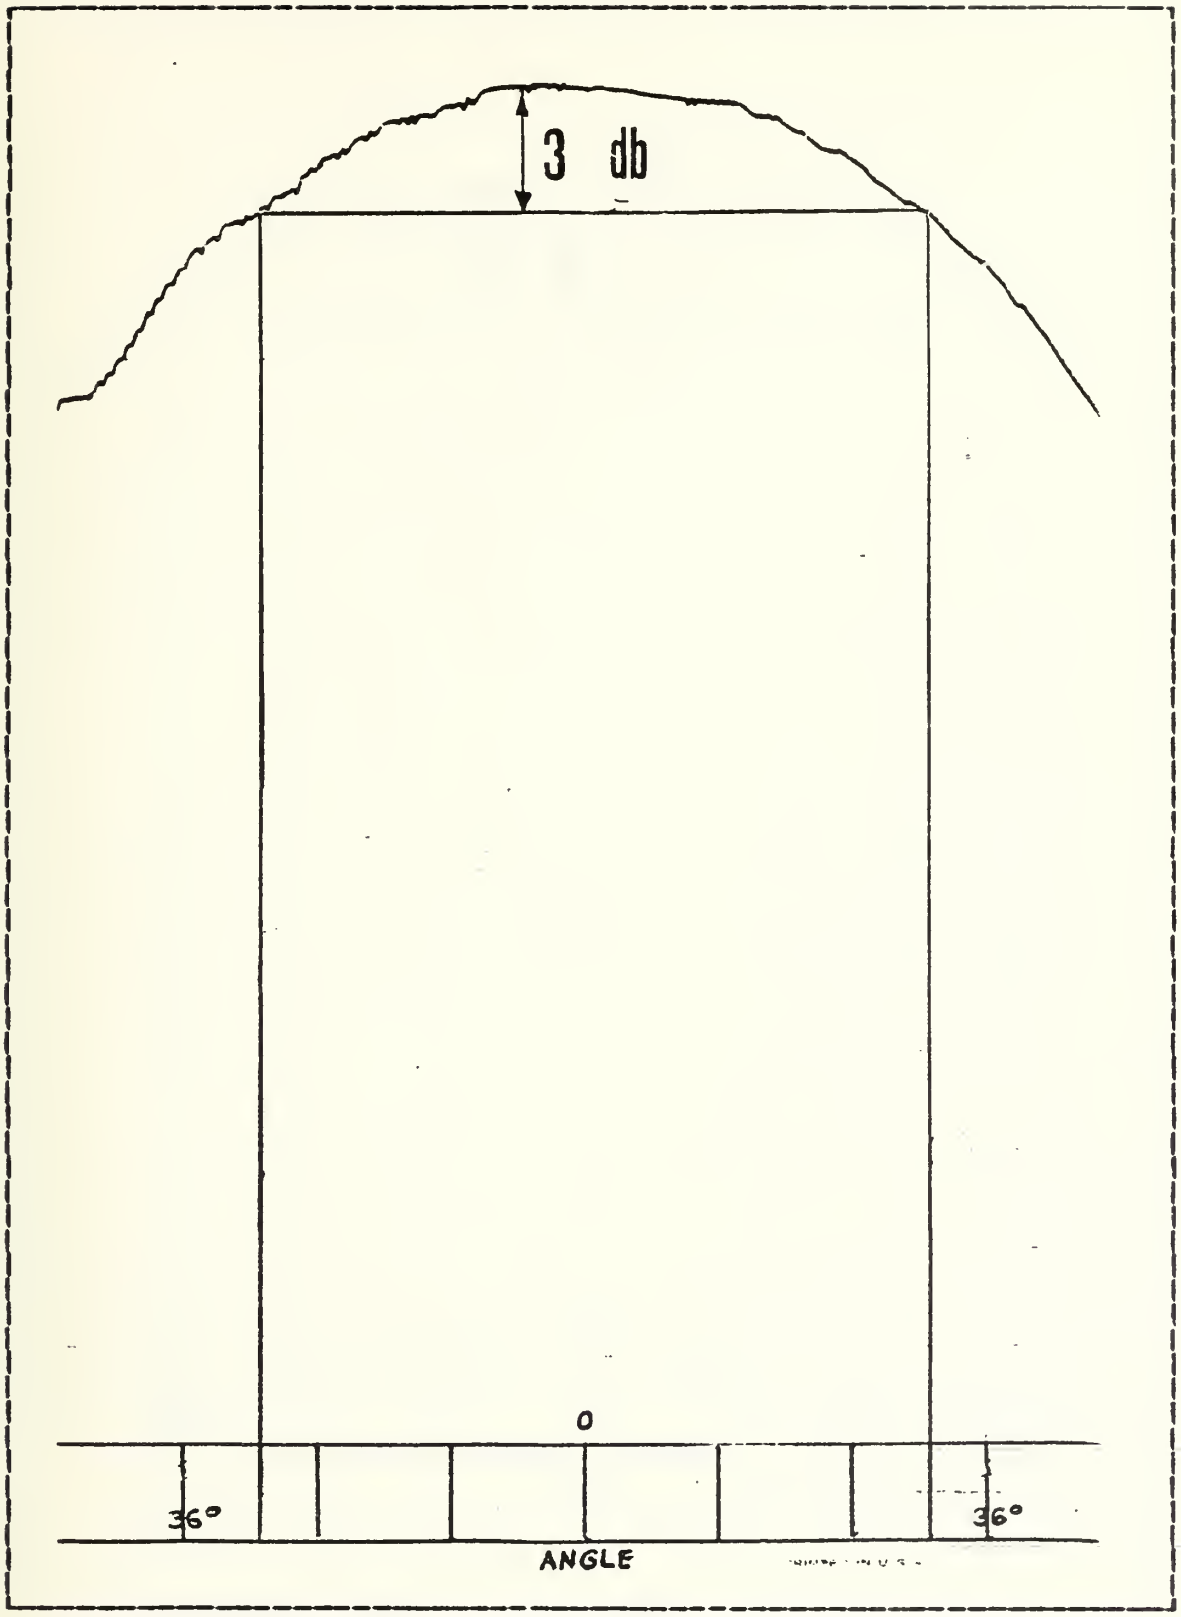

Figure 2.2 Antenna Beam Profile for the Electric Field.

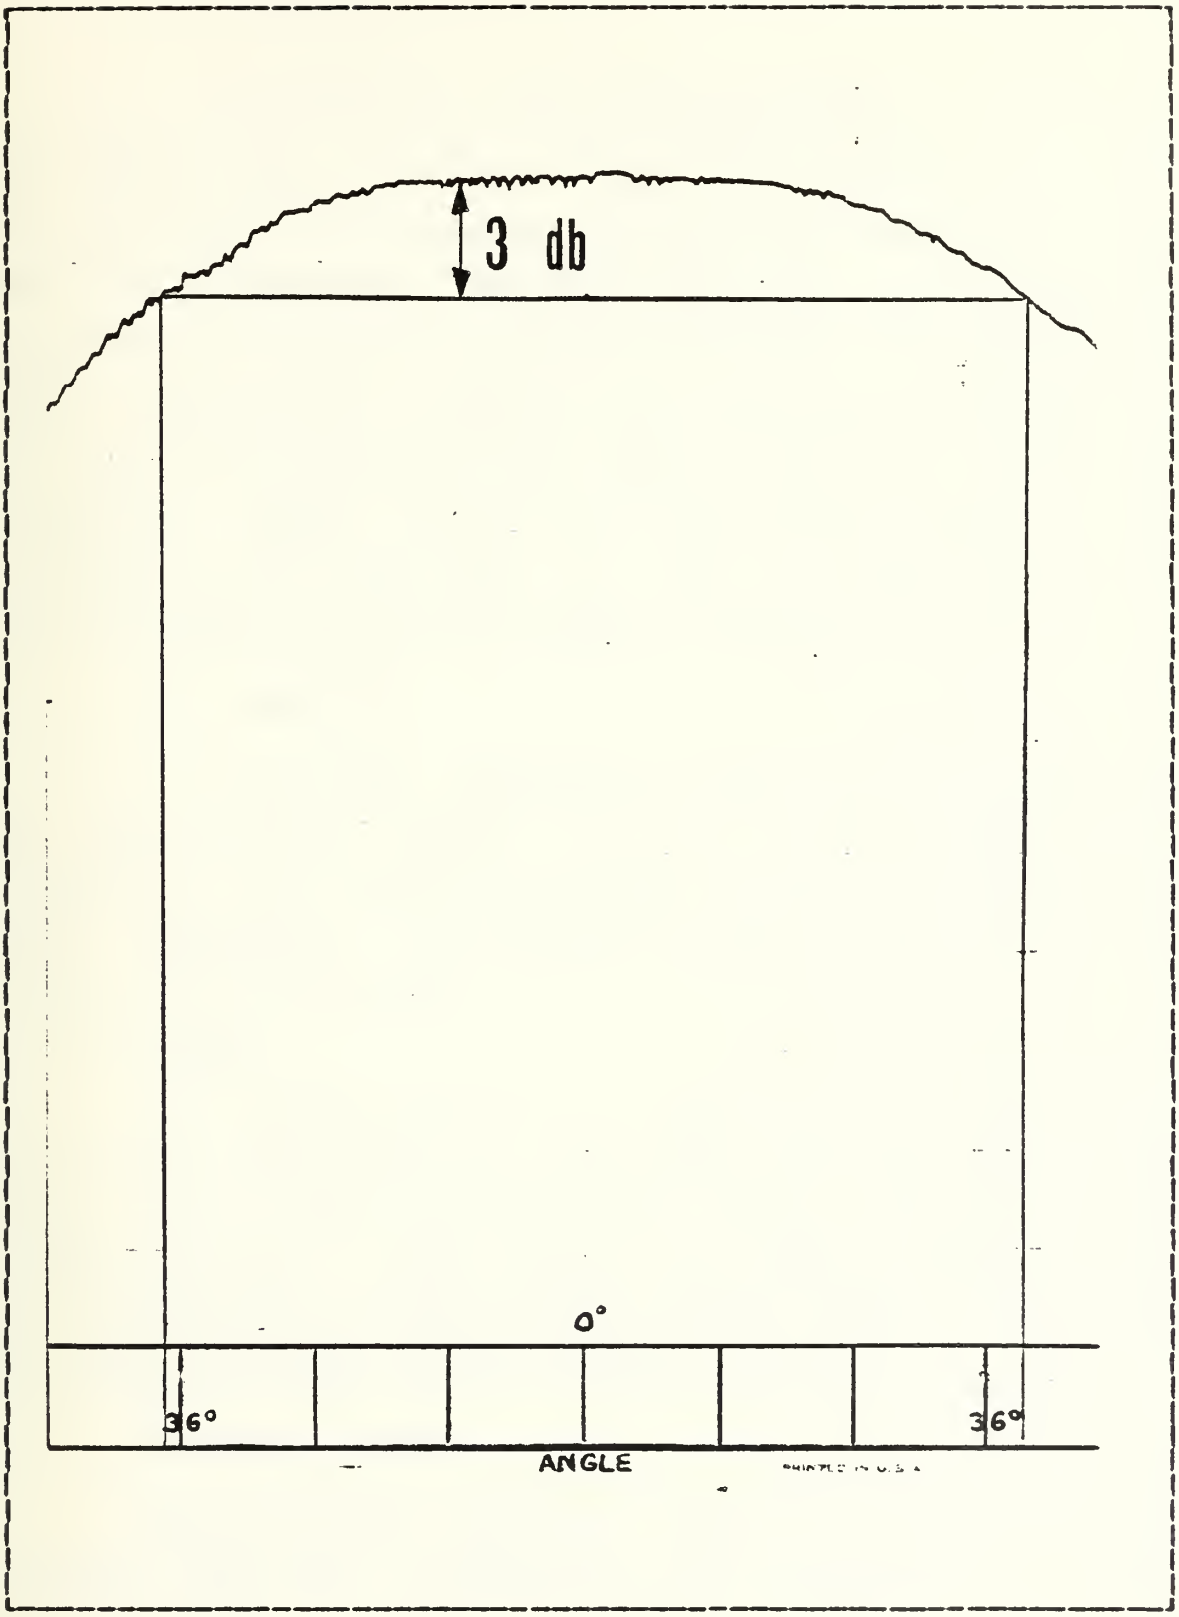

Figure 2.3 Antenna Beam Profile for the Magnetic Field.

b. Filters

In previous experiments reported in [Ref. 4] a section of X-band waveguide was included between the antenna and the crystal detector. This waveguide serves as a partial filter of the microwave radiation, since it does not pass the fundamental frequency (2.86 GHz) nor the second harmonic (5.71 GHz). Use of the X-band waveguide as a filter was included as one of the variants in this experiment. Additionally, filters were available which were able to select the third and the fourth harmonics of the bunch frequency. These filters were designed and built by K. Alexander and S. Hamel [Ref. 5]. The band-pass characteristics for these filters are shown in figures 2.4 and 2.5.

c. Detector

The final component in the detection apparatus was the detector itself, an HP X-band X424A crystal detector. The detector was used without the square-law load. Therefore, the response varied linearly with the input (Cerenkov) signal.

5. Cable

In the work done by A. Saglam [Ref. 4] the experimental area (end station of the LINAC) was described as very noisy due to the electromagnetic energy radiated by the LINAC klystrons. This problem was effectively solved in this experiment by using doubly-shielded cable to transmit the detected signal to the observer station.

6. Observer Station

The analyzing equipment consisted of an ORTEC 450 Research Amplifier, a TEKTRONIX 7904A Oscilloscope, and a TRACER NORTHERN TN-7200 Pulse Height Analyzer (PHA). The

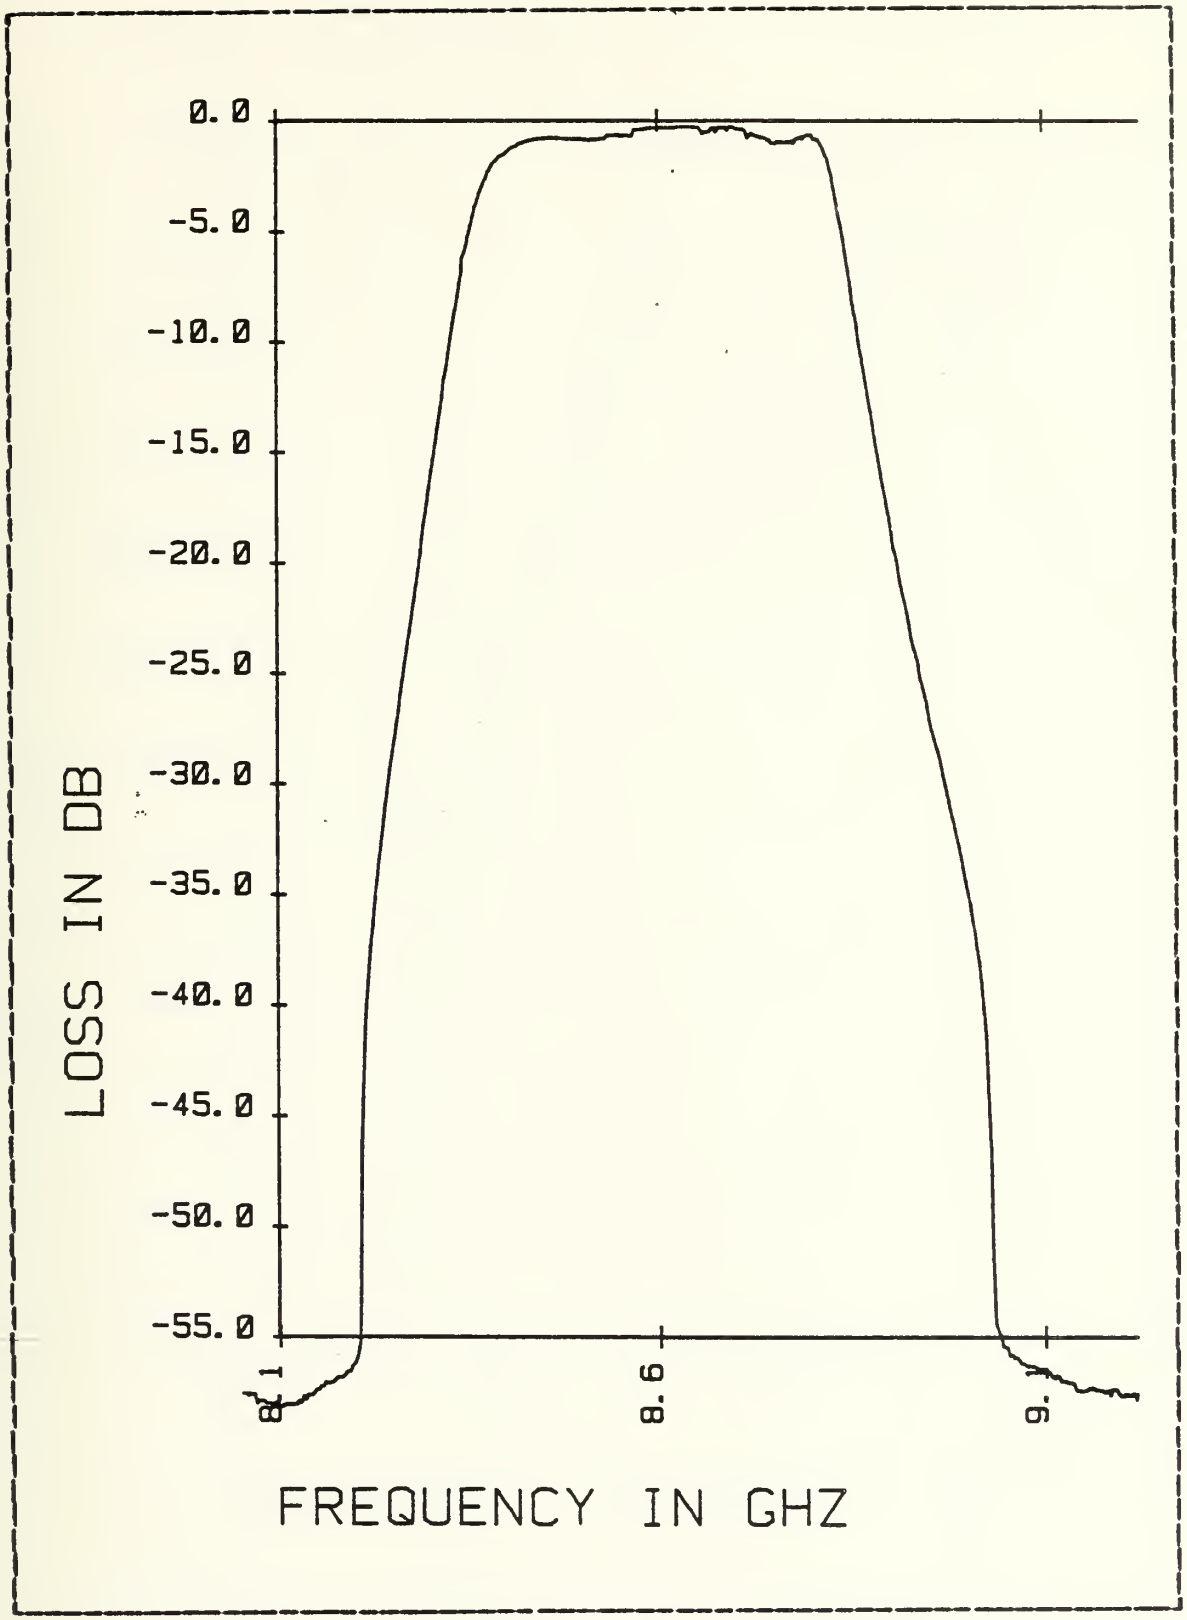

Figure 2.4 Filter Band-pass for the Third Harmonic.

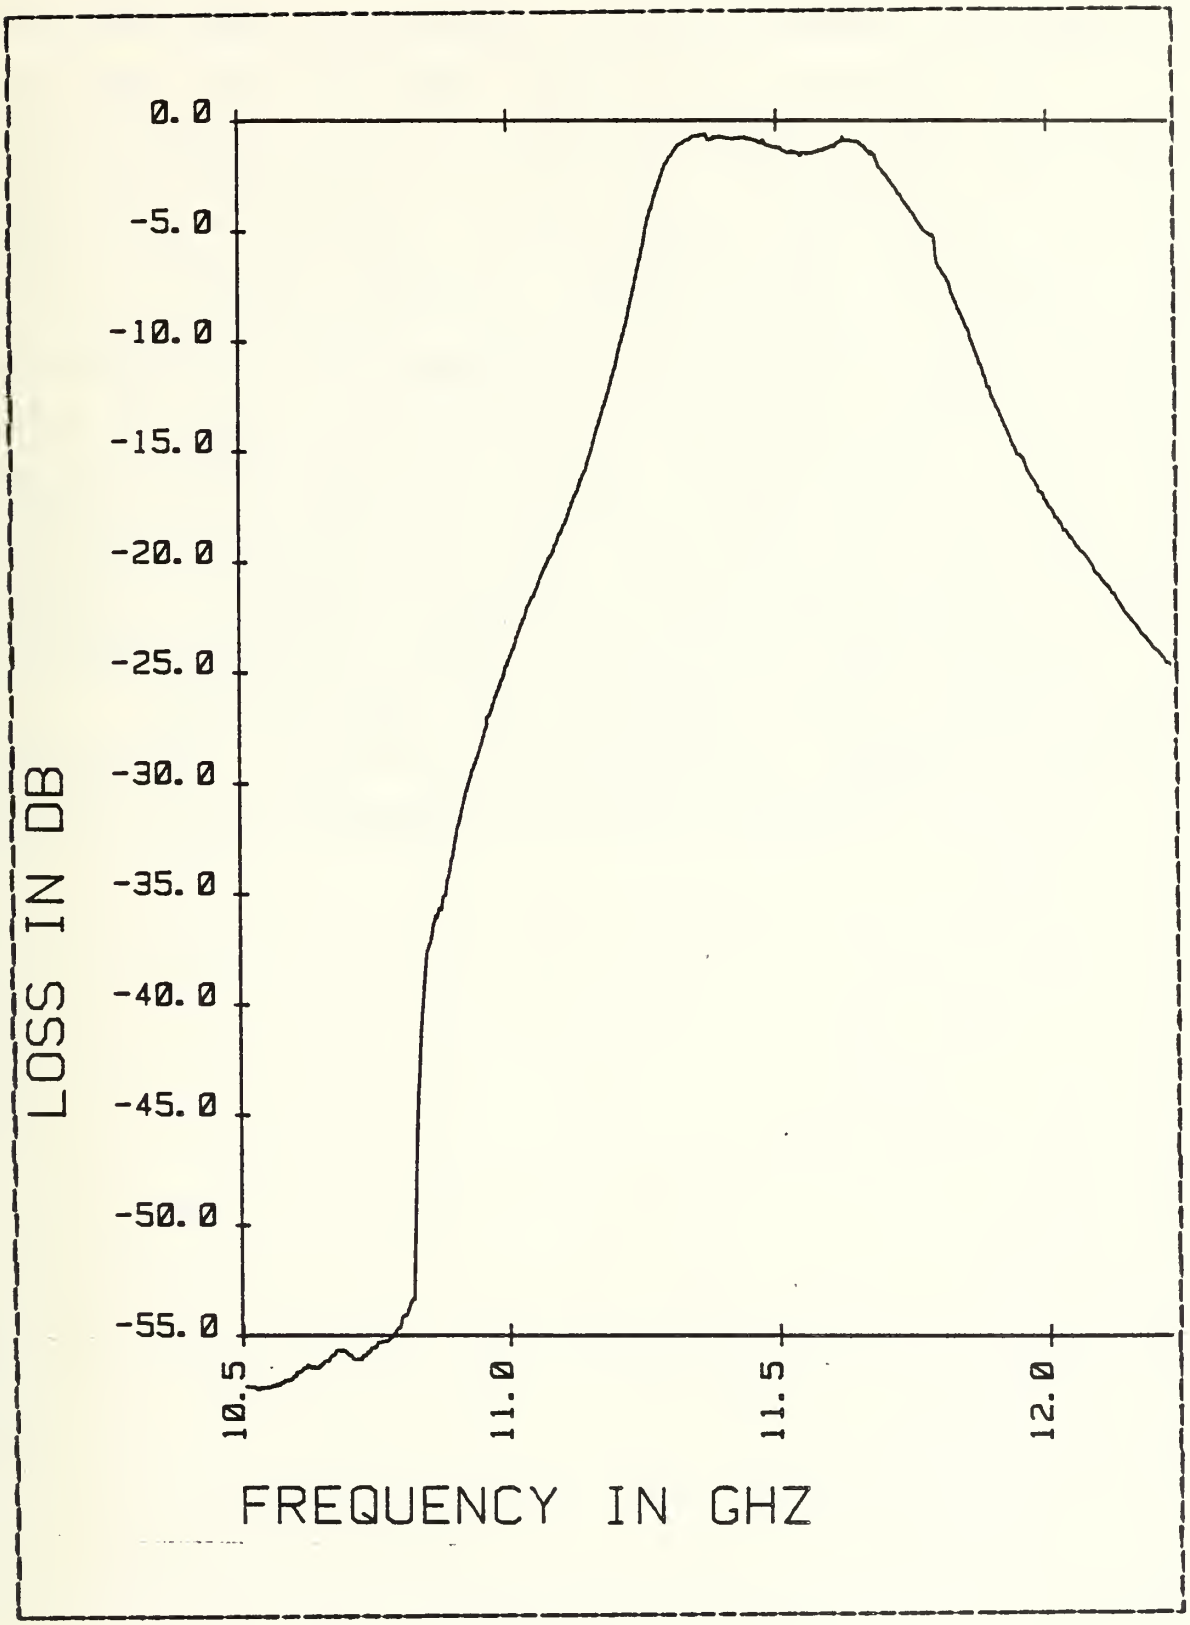

Figure 2.5 Filter Bandpass for the Fourth Harmonic.

critical piece of equipment for experimental purposes was the PHA. This instrument divided the detection range into a predetermined number of channels (e.g. 1024) and then recorded graphically the frequency with which each signal channel was detected. This allowed the observer to deal with a certain degree of variability in the signal, by choosing the observed value to be the peak of the frequency distribution. The frequency distributions observed ranged from very sharp spikes at the lower signal levels to typically broader peaks at higher signal levels. The PHA display also provided an measure of LINAC stability. If the frequency distribution of the detected signal was extremely broad or if multiple peaks were formed while detection angle remained constant, machine instabilities were indicated.

This concludes the discussion of the experimental apparatus. Comparison of experimental results to theoretical curves is presented in the next chapter.

III. RESULTS

A. METHOD OF DATA REDUCTION

As explained in Chapter 2, the raw data from the experiment was in the form of signal (power) versus angle. Since the signal was processed through a series of elements (filter, detector, amplifier, PHA), a measurement of the absolute power was not available. Therefore, it was necessary to normalize these measurements in order to make comparisons with the theoretical curves. The method of normalization chosen was the matching of peaks. For a given experiment, the experimental points were examined to determine which one had the peak value. This value was then adjusted such that it exactly matched (in magnitude) the peak value of the appropriate theoretical curve. All other experimental points for that experiment were then adjusted by the same factor, so that the experimental points maintained the same relative magnitudes.

B. DATA

The results presented here are characteristic for the experiments which were performed. Each figure shows the theoretical curve for the harmonics assumed to be present for a given filter, with the experimental points overlaid and normalized to the peak value of the theoretical curve. Tabular data for figures 3.1 through 3.5 are presented in Appendix E. Figure 3.1 and 3.2 compare the theoretical curves for harmonics three and four to the radiation measured with the appropriate filters inserted before the detector. Figure 3.3 compares the theoretical curve for the sum of harmonics three through seven with the radiation

measured with an X-band waveguide inserted before the detector.

These results appear to be good enough to indicate an initial verification of the theory. Results were best for the fourth harmonic (figure 3.2), with very close agreement between theory and experimental points. The experimental results for the third harmonic (figure 3.1) are shifted somewhat to the left of theory, while the results for the sum of harmonics (figure 3.3) are shifted to the right.

One predicted effect which is clearly evident despite the shifting is the relative spread of the Cerenkov angle for different harmonics. The third harmonic is predicted to spread the radiation over a broader range of angles than does the fourth harmonic, and this is verified by the experimental results.

There are several possible explanations for the deviations from theory which are shown here. For example, certain assumptions necessary for theoretical simplicity may not hold in the experimental situation. It may be that the charge distribution of the electron bunches is not Gaussian, or that a lateral parameter should be included in the Gaussian to account for divergence of the beam over the air path. Another factor possibly affecting the results was the mirror tilt, which caused the air path length to be longer than one meter on one side of the beam, and shorter on the other.

Another factor which must affect the results to some degree is simply the experimental geometry. For a number of reasons, theory calls for the field point distances to be much greater than the source point distances. That is, the path length should be small in relation to the distance to the point at which the fields are measured. However, the dimensions of the LINAC end station prohibit this, so that at angles larger than just a few degrees, there is ambiguity

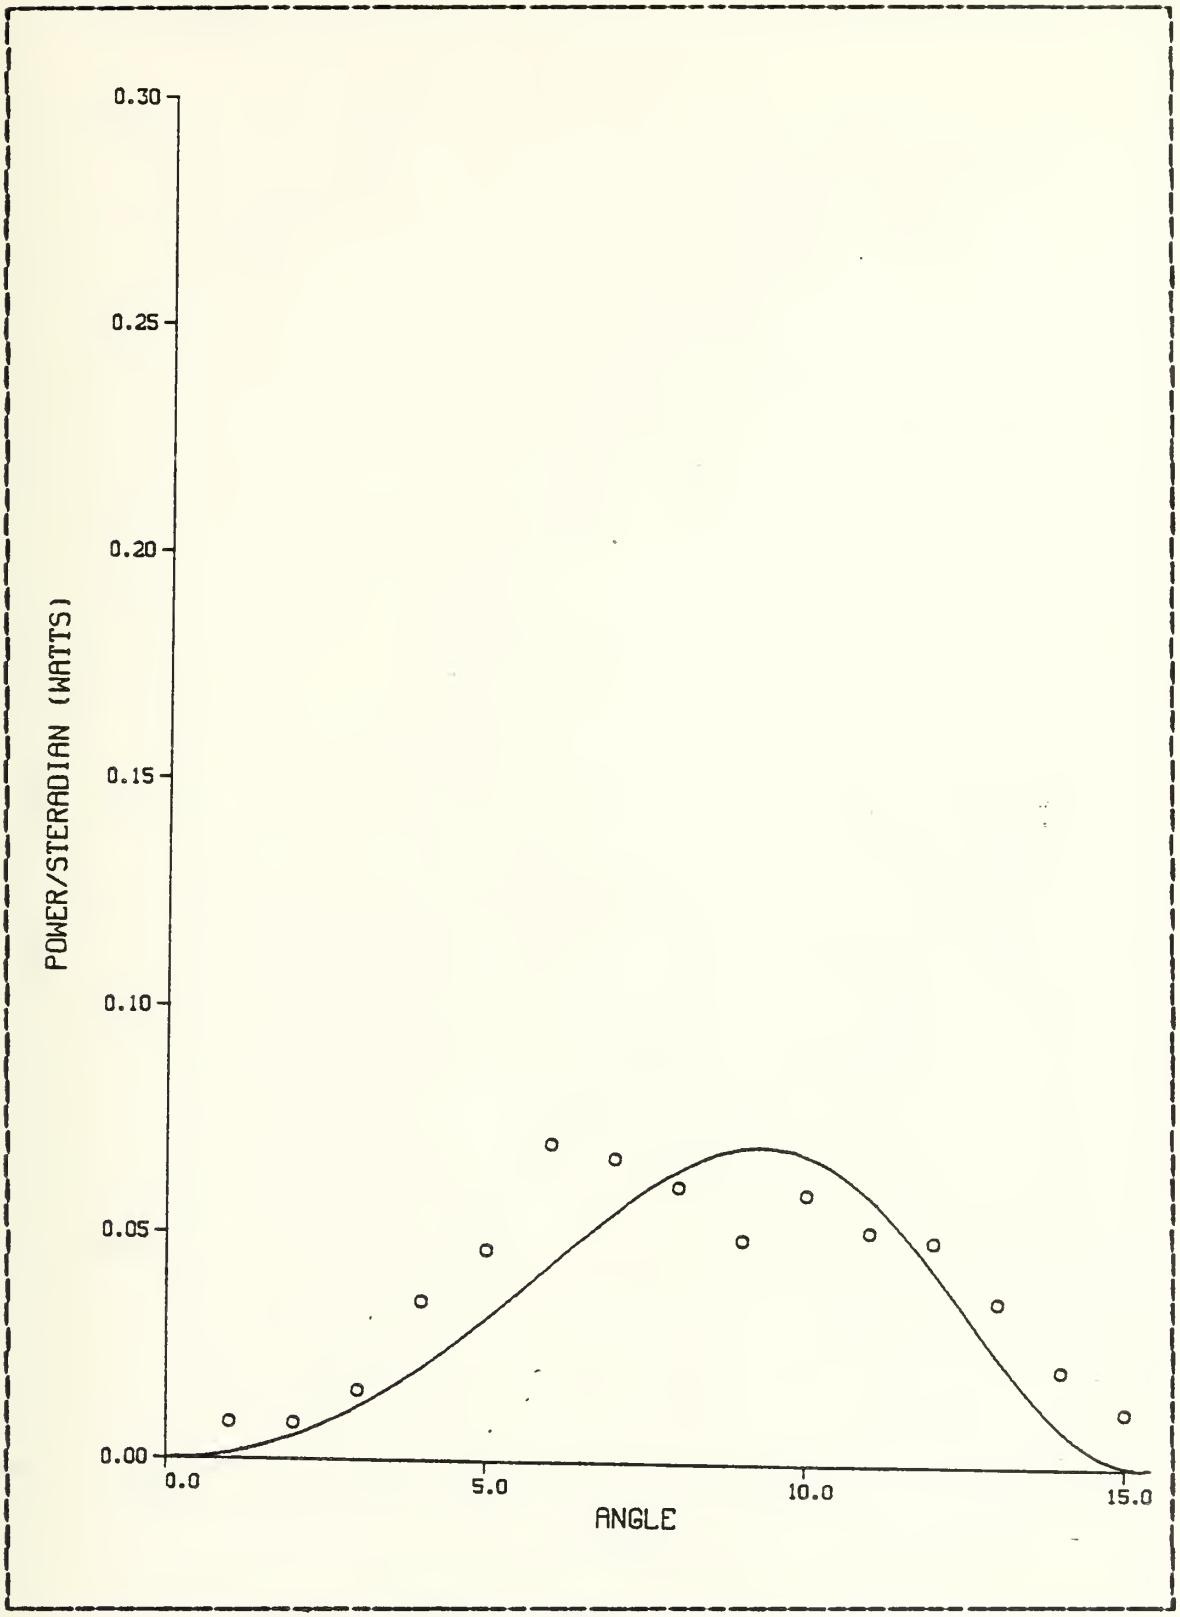

Figure 3.1 Harmonic=3 : L=1.0 m: Filter = 3rd.

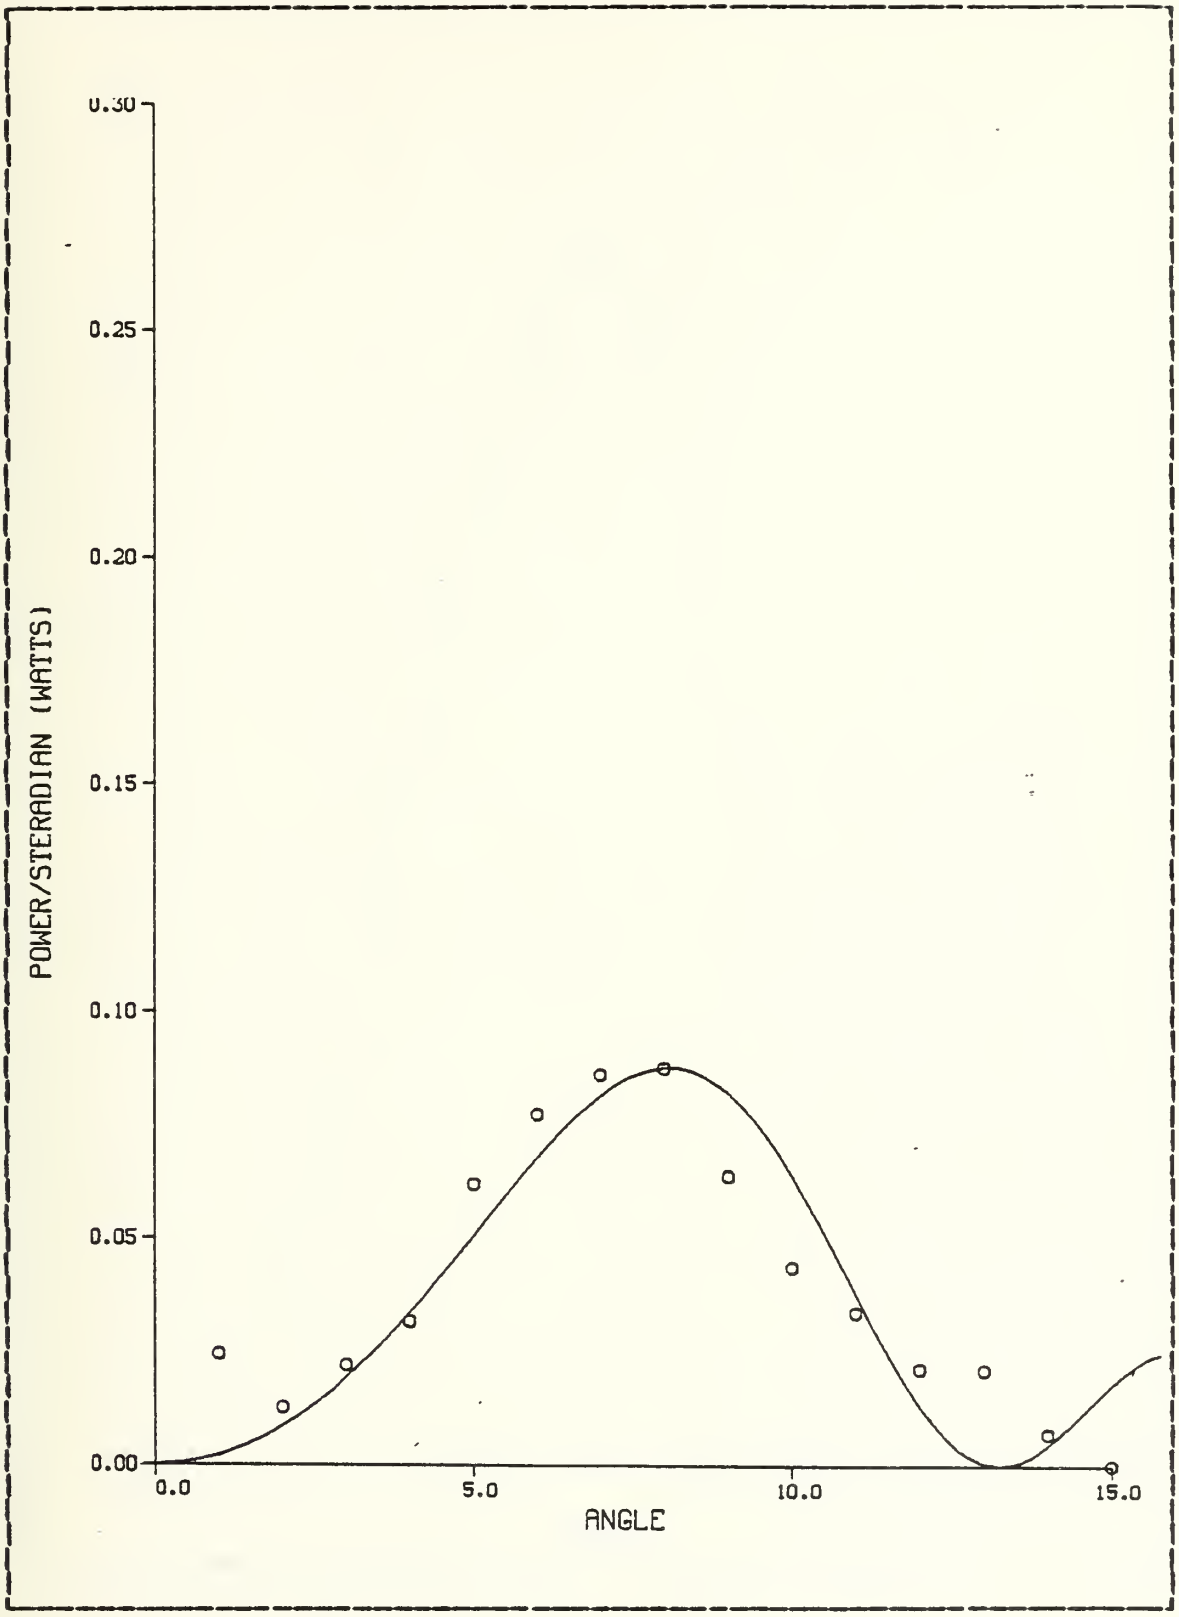

Figure 3.2 Harmonic=4 : L = 1.0 m : Filter=4th.

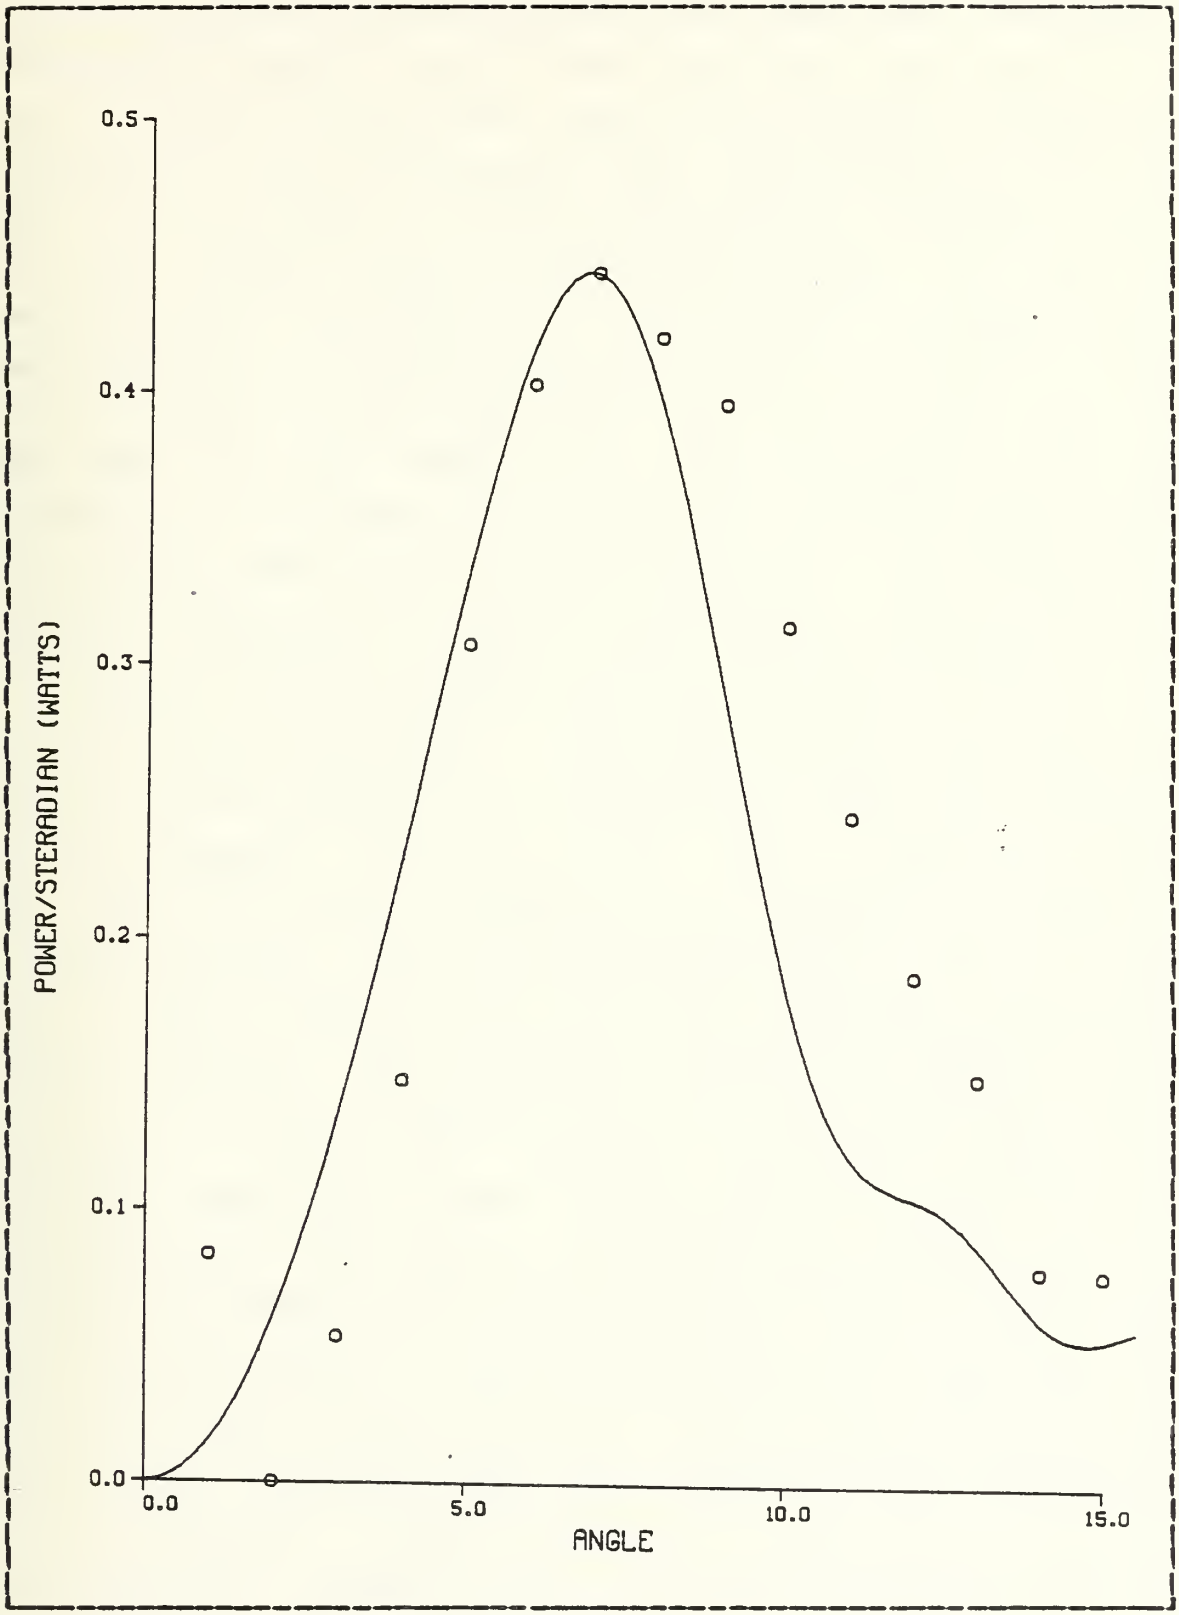

Figure 3.3 Harmonics= 3-7 : L = 1.0 m : Filter = Waveguide.

regarding exactly which angle is being measured. For small observation angles, the air path does look like a point, but as the angles become larger there are increasing differences between the angle as measured from the beginning of the air path and the angle as measured from the end of the air path. At large angles (greater than five degrees) the angle as measured from the center of the air path is substantially smaller than that measured from the end of the path. Since the radiation originating from the end of the path is stronger (it has traveled a smaller distance to the detector), and since this radiation originates at an angle larger than that which is being measured, the radiation at the measured angle is actually overstated. This may be the cause of the shift to higher angles observed in figure 3.3.

Finally, the frequency range over which the filters are valid must be considered. The X-band filters and waveguide used in this experiment are designed for use with radiation in the frequency range 8.2 to 12.4 GHz. Radiation within this band will only propagate in the dominant TE mode in X-band waveguide. Note that this encompasses only the third (8.57 GHz) and the fourth (11.42 GHz) harmonics of the LINAC bunch frequency. When radiation outside this frequency band is fed into the waveguide (as with the fifth and higher harmonics of the bunch frequency which are expected in Cerenkov radiation), modes other than the dominant may be excited in the waveguide. As indicated by [Ref. 6], the effects of coupling multiple modes into and out of a waveguide are complex, and the normal single probe configuration for detecting signal energy in the dominant mode cannot be reliably used in this situation. Since frequencies outside the X-band operating range were expected to be present in this experiment, modes higher than the dominant may have been excited, thereby causing inaccuracies in the measurement of power by the signal detector.

A comparison was made to test for the possibility that frequencies outside the X-band operating range were not being accurately measured by the single probe detector. Figure 3.3 compares the theoretical sum of harmonics 3-7 with the data measurements from the X-band waveguide, using no filter in the waveguide. Adding higher harmonics to the sum, although theoretically correct, would cause a larger discrepancy between theory and experiment, since higher harmonics are shifted towards smaller angles. Assuming the worst case, that harmonics five and above excite modes in the waveguide which are somehow not correctly coupled and detected, implies the possibility that only harmonics three and four are being measured when X-band waveguide is used as a filter. Figure 3.4, showing the data gathered with the waveguide filter normalized against the sum of harmonics three and four, appears to fit the data better, in that the width of the theoretical curve is more closely approximated by the experimental points than in figure 3.3. This lends some credence to the supposition that the detector does not respond well to harmonics higher than the fourth.

A second comparison was made to investigate the possibility that the filters which were used to isolate the third and fourth harmonics were also passing higher resonant frequencies.Such higher frequencies would be close to multiples of the frequency which the filter was designed to pass. For example, figure 3.1 compares the data gathered with the filter for the third harmonic to the theoretical curve for the third harmonic. Figure 3.5 compares the same data to the theoretical sum of the third and sixth harmonics. Note that a somewhat better fit of the data at the smaller angles is obtained in figure 3.5, indicating that the filter may be passing higher resonant frequencies, which in this case are measured by the detector, despite the effects of higher modes which may have been excited.

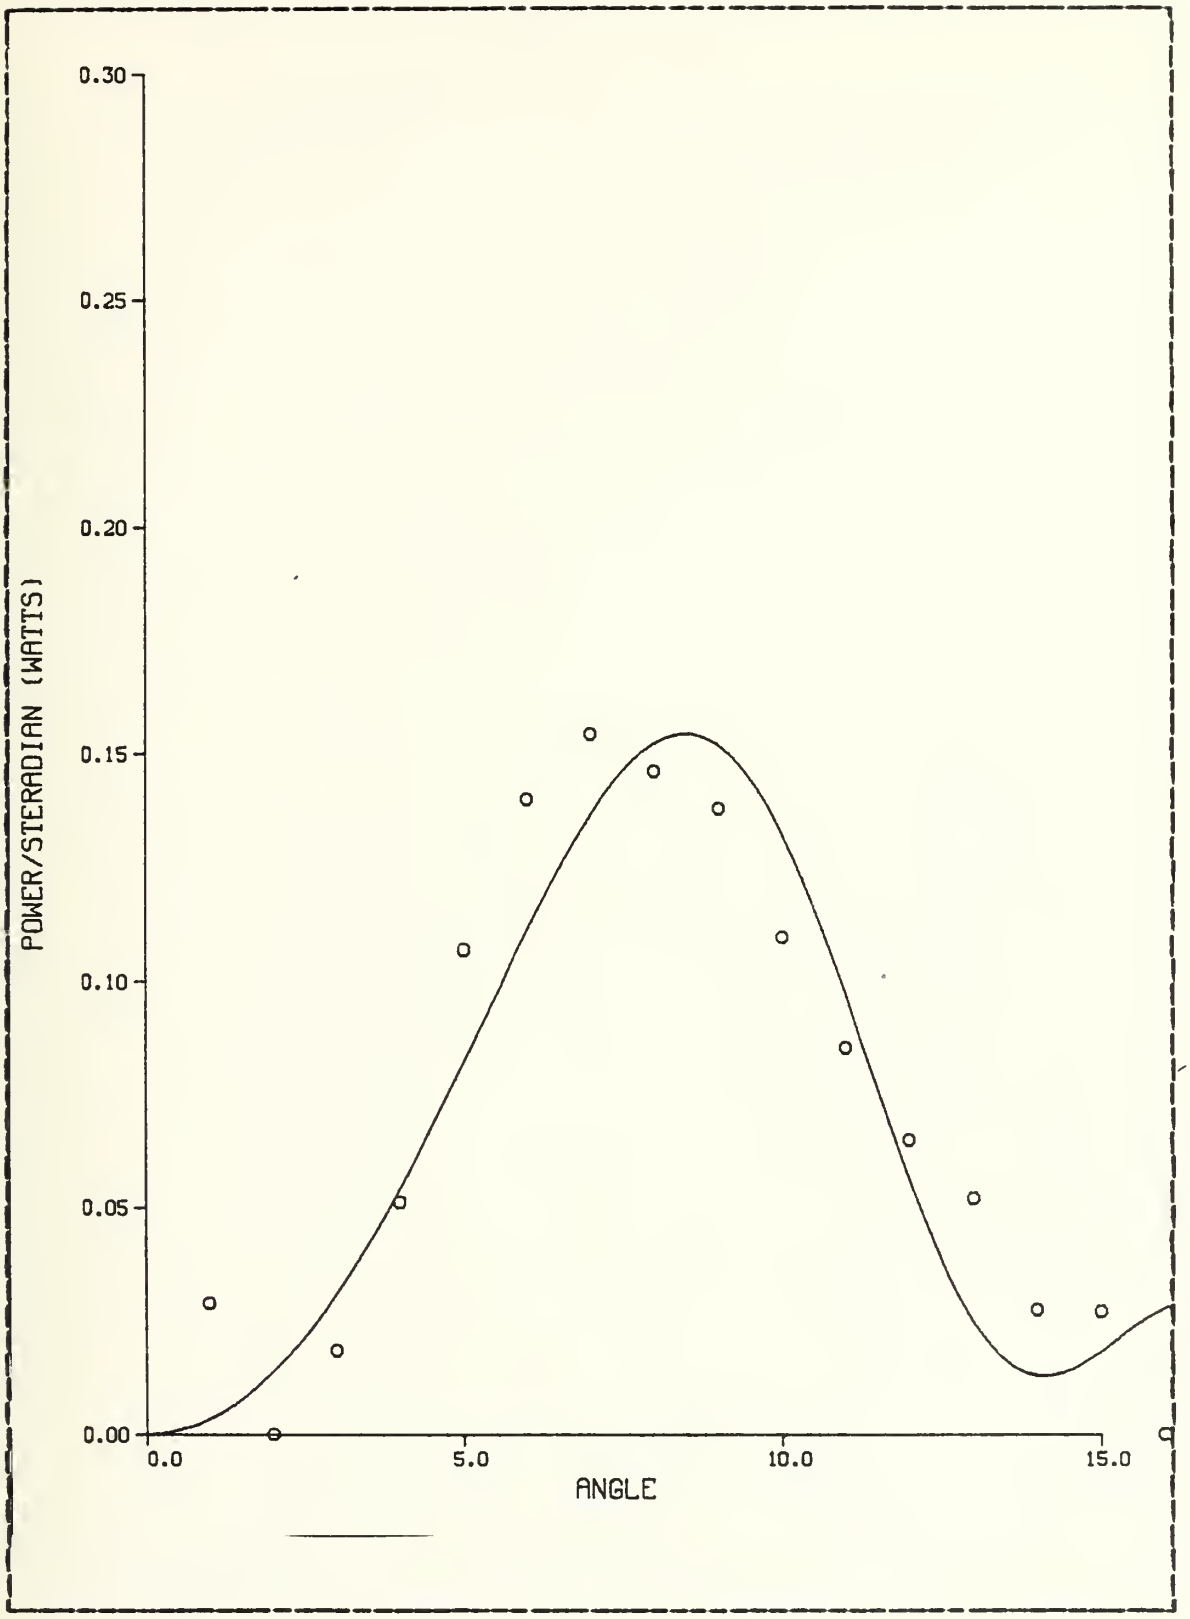

Figure 3.4 Harmonics= 3 + 4 : L=1.0 m : Filter = Waveguide.

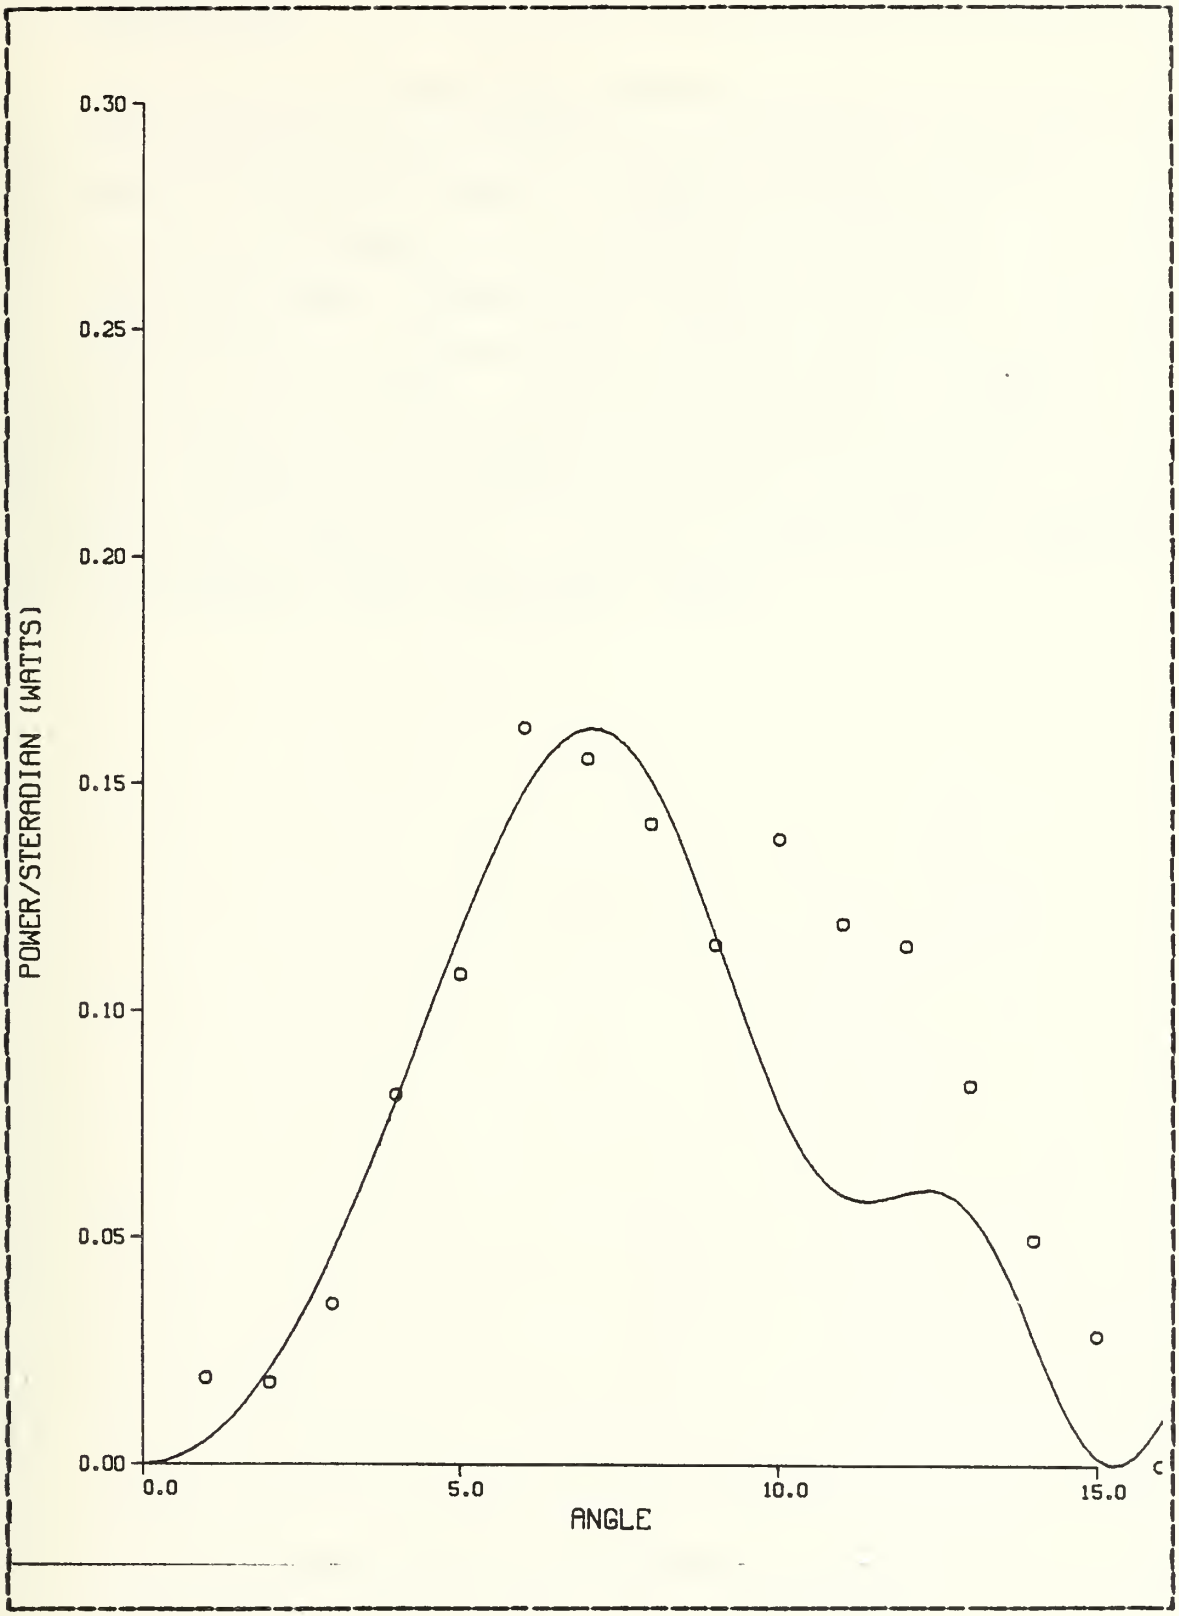

Figure 3.5 Harmonics= 3 + 6 : L=1.0 m : Filter = 3rd.

C. CONCLUSIONS

The results presented here demonstrate initial confirmation of the theory. Although it is difficult to improve the geometry of the experiment, definite improvements can be made in the measurement of the microwave radiation. Instead of using waveguide filters and a crystal detector (the use of which leads to measurement ambiguities for harmonics greater than the fourth), a tunable YIG filter coupled to a spectrum analyzer of appropriate sensitivity should be used. This will enable the observer to isolate harmonics for measurement without ambiguity, as well as allowing the measurement of absolute (vice relative) power.

APPENDIX A

FORTRAN PROGRAM FOR CALCULATING CERENKOV RADIATION CURVES

This is an interactive program which calculates and plots Cerenkov radiation curves for the case of a finite path length. Up to five different harmonics of the electron bunch frequency and five different lengths of emission path may be selected for presentation. The program also allows for adjustment of all basic parameters and constants of the Cerenkov power equation. A different curve will be plotted for each distinct combination of path length and harmonic.

```
C    THIS PROGRAM CALCULATES AND PLOTS CERENKOV RADIATION CURVES.  UP TO  CEROCC10
C    FIVE HARMONICS AND FIVE LENGTHS OF EMISSION REGION MAY BE CHOSEN.    CEROCC20
C    A DIFFERENT CURVE WILL BE PLOTTED FOR EACH DISTINCT COMBINATION OF   CEROCC30
C    LENGTH AND HARMONIC.                                                 CEROCC40
C                                                                         CEROCC50
      REAL N, MU, KAY, MO, NUO, IF,B,C,GAMMA,BETA,V,CCSTC,                CEROOC60
     *                  C1,U,F,CO,N,MU,NUO,Q,E,MO,B                       CEROOC70
      DIMENSION W(1000), THETA(1000), HARM(5), CELL (5)                   CEROCC80
C                                                                         CEROCC90
C     INITIALIZE CONSTANTS                                                CEROC100
      DATA ICC/'CO  '/,IN/'N   '/,IMU/'MU  '/,INUO/'NUO '/,               CEROC110
     *     IQ/'Q   '/,IE/'E   '/,IMO/'MO  '/,IB/'B   '/,IY/'Y'/,INO/'N'/CEROO120
          NPOINT = 101                                                    CEROC130
          THETAF = 20.0                                                   CEROC140
          PI = 3.14159265359                                              CEROC150
          DGTORD = 0.01745329251994                                       CEROC160
          RDTODG = 57.29577951308                                         CEROC170
C                                                                         CEROC180
C     *** INITIALIZE PROGRAM CONSTANTS                                    CEROC190
          CO  =  2.997925E08                                              CEROO200
          N   =  1.000268E00                                              CEROC210
          MU  =  1.256E-06                                                CEROO220
          NUC =  2.85E09                                                  CEROC230
          Q   =  1.94E-12                                                 CEROC240
          E   =  1.6E-11                                                  CEROC250
          MO  =  9.10953E-31                                              CEROC260
          B   =  .0024E00                                                 CEROC270
C                                                                         CEROC280
C     *** ARE PROGRAM CONSTANTS OK?                                       CEROC290
 10       WRITE(6,900) CO,N,MU,NUO,Q,E,MO,B                               CEROO300
          READ(5,901) IANS                                                CEROO310
          IF (IANS.EQ.INO) GO TO 40                                       CEROC320
C     *** NO, PROGRAM CONSTANTS NEED TO BE CHANGED                        CEROO330
          WRITE(6,902)                                                    CEROC340
          READ(5,903) IANS                                                CEROC350
C                                                                         CEROO360
          IF(IANS.NE.ICO) GO TO 11                                        CEROC370
             WRITE(6,904) IANS                                            CEROO380
             READ(5,*) CO                                                 CEROC390
             GO TO 10                                                     CEROC400
C                                                                         CEROC410
 11       IF(IANS.NE.IN) GO TO 12                                         CEROC420
             WRITE (6,904) IANS                                           CEROC430
             READ (5,*) N                                                 CEROC440
             GO TO 10                                                     CEROC450
C                                                                         CEROC460
 12       IF(IANS.NE.IMU) GO TO 13                                        CEROC470
             WRITE (6,904) IANS                                           CEROC480
```

```
                READ  (5,*) MU                                                  CEROC490
                GO TO 10                                                        CEROC500
C                                                                               CEROC510
 13         IF(IANS.NE.INU0) GO TO 14                                          CEROC520
                WRITE (6,904) IANS                                              CEROC530
                READ (5,*) NU0                                                  CEROC540
                GO TO 10                                                        CEROC550
C                                                                               CEROC560
 14         IF(IANS.NE.IQ) GO TO 15                                            CEROC570
                WRITE (6,904) IANS                                              CEROC580
                READ (5,*) C                                                    CEROC590
                GO TO 10                                                        CEROC600
C                                                                               CEROC610
 15         IF(IANS.NE.IE) GO TO 16                                            CEROC620
                WRITE (6,904) IANS                                              CEROC630
                READ (5,*) E                                                    CEROC640
                GO TO 10                                                        CEROC650
C                                                                               CEROC660
 16         IF(IANS.NE.IM0) GO TO 17                                           CEROC670
                WRITE (6,904) IANS                                              CEROC680
                READ (5,*) M0                                                   CEROC690
                GO TO 10                                                        CEROC700
C                                                                               CEROC710
 17         IF(IANS.NE.IB) GO TO 18                                            CEROC720
                WRITE (6,904) IANS                                              CEROC730
                READ (5,*) B                                                    CEROC740
                GO TO 10                                                        CEROC750
                                                                                CEROC760
C           *** ERROR                                                           CEROC770
 18              WRITE(6,910)                                                   CEROC780
                 GO TO 10                                                       CEROC790
C                                                                               CEROC800
 40    WRITE(6,905)                                                            CEROC810
       READ(5,*) HARM(1),HARM(2),HARM(3),HARM(4),HARM(5)                       CEROC820
       WRITE(6,906)                                                            CEROC830
       READ(5,*) CELL(1),CELL(2),CELL(3),CELL(4),CELL(5)                       CEROC840
C                                                                              CEROC850
C      CALL TEK618                                                             CEROC860
C      CALL PTEKAL                                                             CEROC870
C      CALL PRTPLT(72,6)                                                       CEROC880
C      CALL VRSTEC(0,0,0)                                                      CEROC890
       CALL COMPRS                                                             CEROC900
C                                                                              CEROC910
C      CALL NCERDR                                                             CEROC920
C      CALL PAGE(8.5,11.0)                                                     CEROC930
C                                                                              CEROC940
C   THE LOCATION OF THE ORIGIN:                                                CEROC950
       CALL PHYSOR(1.0,1.0)                                                    CEROC960
```

```
C                                                                       CER00970
C   THE AREA IN INCHES BY INCHES:                                       CER00980
      CALL AREA2D(7.0,10.0)                                             CER00990
C                                                                       CER01000
C   WHATEVER LABELS DESIRED ON X AND Y AXIS:                            CER01010
      CALL XNAME ('ANGLE $',100)                                        CER01020
      CALL YNAME ('POWER/STERADIAN (WATTS) $',100)                      CER01030
      CALL YAXANG(0)                                                    CER01040
C                                                                       CER01050
C   WHATEVER HEADING DESIRED FOR GRAPH:                                 CER01060
      CALL HEADIN('THIS IS A HEADING$',100,1.2,2)                       CER01070
C     CALL HEADIN('HEADING ON NEXT LINE$',100,1.2,2)                    CER01080
C                                                                       CER01090
C   RANGE AND INCREMENTS OF X AND RANGE AND INCREMENTS OF Y             CER01100
      CALL GRAF (0.0, 5.0,15.0, 0.0, .01,0.15)                          CER01110
C                                                                       CER01120
C                                                                       CER01130
C   NEED SPLINE FOR SMOOTH FIT (OTHERWISE GET LINEAR FIT)               CER01140
C     CALL SPLINE                                                       CER01150
 45   DO 70 J = 1,5                                                     CER01160
        IF (HARM(J).EQ.0) GO TO 70                                      CER01170
C                                                                       CER01180
 50       DO 75 K = 1,5                                                CER01190
            IF (CELL(K).EQ.0) GO TO 70                                  CER01200
C                                                                       CER01210
C          *** BEGIN CALCULATIONS                                       CER01220
              C = CO / N                                                CER01230
              GAMMA = E / (MO*CO*CO)                                    CER01240
              BETA = (1.0 - 1.0 / (GAMMA*GAMMA) ) ** 0.5                CER01250
              V = BETA * CO                                             CER01260
              COSTC  = C / V                                            CER01270
              C1 = MU*C*NUC*NUO*Q*Q / (8.0*PI*PI)                       CER01280
              KAY = 2.0*PI*HARM(J)*NUO / C                              CER01290
C                                                                       CER01300
              WRITE(50,*) KAY,COSTC,HARM(J), CELL(K)                    CER01310
C                                                                       CER01320
C          *** CALCULATE FUNCTIONAL VALUES                              CER01330
              RADF = THETAF * DGTORD                                    CER01340
              XPOINT = FLOAT(NPOINT-1)                                  CER01350
              DO 80 I=1,NPOINT                                          CER01360
                RATIO = FLOAT(I-1) / XPOINT                             CER01370
                ANGLE = RATIO * RADF                                    CER01380
                THETA(I) = RATIO * THETAF                               CER01390
                F = 1/(EXP(0.25 * B*KAY*COS(ANGLE) * B*KAY*COS(ANGLE) ))CER01400
                U =(KAY * CELL(K) * (COSTC-COS(ANGLE)))/2               CER01410
                IF = SIN(U) / U                                         CER01420
                W(I) =  C1 * (F*KAY*CELL(K)*SIN(ANGLE)*IF)**2           CER01430
C                                                                       CER01440
```

```
                WRITE(50,*) W(I),THETA(I),F,IF                                  CER01450
C                                                                               CER01460
 80             CONTINUE                                                        CER01470
C                                                                               CER01480
C  CALL CURVE FOR EACH CURVE DESIRED (0 IN LAST PARAMETER                       CER01490
C  INDICATES DO NOT DISPLAY DATA POINTS, 1 MEANS DISPLAY                        CER01500
C  EVERY DATA POINT)                                                            CER01510
      CALL CURVE (THETA,W,NPOINT,0)                                             CER01520
C     CALL CURVE (X,Y,N,0)                                                      CER01530
C     CALL CURVE (X,YY,N,0)                                                     CER01540
C                                                                               CER01550
 75      CONTINUE                                                               CER01560
C                                                                               CER01570
 70   CONTINUE                                                                  CER01580
C                                                                               CER01590
C                                                                               CER01600
C                                                                               CER01610
      CALL ENDPL(0)                                                             CER01620
C                                                                               CER01630
C     ** USER WANT ANOTHER RUN?                                                 CER01640
         WRITE(6,908)                                                           CER01650
         READ(5,901) IANS                                                       CER01660
         IF(IANS.EQ.IY) GO TO 10                                                CER01670
      CALL DONEPL                                                               CER01680
 90   CONTINUE                                                                  CER01690
      STOP                                                                      CER01700
C                                                                               CER01710
 900  FORMAT(/,' PROGRAM CONSTANTS CURRENTLY HAVE VALUES AS FOLLOWS:',/         CER01720
     * ,5X,'CC  =  SPEED OF LIGHT IN VACUUM      =',E14.7,/                     CER01730
     * ,5X,'N   =  AIR REFRACTIVE INDEX          =',E14.7,/                     CER01740
     * ,5X,'ML  =  PERMEABILITY OF AIR           =',E14.7,/                     CER01750
     * ,5X,'NLO =  BUNCH FREQUENCY               =',E14.7,/                     CER01760
     * ,5X,'C   =  ELECTRON CHARGE               =',E14.7,/                     CER01770
     * ,5X,'E   =  ELECTRON ENERGY               =',E14.7,/                     CER01780
     * ,5X,'MC  =  ELECTRON REST MASS            =',E14.7,/                     CER01790
     * ,5X,'B   =  BUNCH SIZE PARAMETER          =',E14.7,//                    CER01800
     * ' DO YOU WANT TO CHANGE ANY OF THESE VALUES? ( Y OR N )')               CER01810
 901  FORMAT(A1)                                                               CER01820
 902  FORMAT(/,' ENTER CONSTANT TO BE CHANGED:')                               CER01830
 903  FORMAT(A4)                                                               CER01840
 904  FORMAT(' ENTER NEW VALUE FOR ',A4,':')                                   CER01850
 905  FORMAT(' ENTER VALUES FOR HARM (HARMONIC OF BUNCH FREQUENCY):')          CER01860
 906  FORMAT(' ENTER VALUES FOR CELL (LENGTH OF EMISSION REGION):')            CER01870
 908  FORMAT(' WANT ANOTHER RUN? ( ENTER Y OR N )')                            CER01880
 910  FORMAT(' THE VARIABLE SELECTED IS NOT IN THE LIST - TRY AGAIN')          CER01890
      END                                                                       CER01900
```

APPENDIX B

FORTRAN PROGRAM - CERENKOV CURVES WITH DATA POINTS

This is an interactive program which calculates and plots several Cerenkov radiation curves as well as a single set of experimentally observed data points. Up to five different harmonics of the bunch frequency and five different lengths of the emission path may be chosen for presentation. A different curve will be plotted for each distinct combination of path length and harmonic. The program also allows adjustment of all basic parameters and constants of the Cerenkov power equation. The program then prompts for 20 data measurements of power (one per degree) which will be superimposed over the curves.

```
C    THIS PROGRAM CALCULATES AND PLOTS CERENKOV RADIATION CURVES FOR      CEROOC10
C    UP TO FIVE DIFFERENT HARMONICS AND FIVE DIFFERENT LENGTHS OF        CEROOC20
C    EMISSION REGION.  A DIFFERENT CURVE WILL BE CALCULATED FOR EACH     CEROOC30
C    DISTINCT COMBINATION OF LENGTH AND HARMONIC.  THE PROGRAM THEN ASKS  CEROOC40
C    FOR 20 DATA POINTS (ONE PER DEGREE) TO BE SUPERIMPOSED OVER THE     CEROOC50
C    CURVES.                                                             CEROOC60
C                                                                        CEROOC70
      REAL N, MU, KAY, MO, NUO, IF,B,C,GAMMA,BETA,V,COSTC,               CEROOC80
     *                  C1,U,F,CO,N,MU,NUO,Q,E,MO,B                      CEROOC90
      DIMENSION W(1000), THETA(1000), HARM(5), CELL (5), THETAP(20),     CEROOC100
     *          POWER(20)                                                CEROOC110
C                                                                        CEROOC120
C     INITIALIZE CONSTANTS                                               CEROOC130
      DATA ICO/'CO  '/,IN/'N   '/,IMU/'MU  '/,INUO/'NUO '/,              CEROOC140
     *     IQ/'Q   '/,IE/'E   '/,IMO/'MO  '/,IB/'B   '/,IY/'Y'/,INO/'N'/CEROOC150
      NPOINT = 101                                                       CEROOC160
      THETAF = 20.0                                                      CEROOC170
      PI = 3.14159265359                                                 CEROOC180
      DGTORD = 0.01745329251 99                                          CEROOC190
      RDTODG = 57.29577951308                                            CEROOC200
C                                                                        CEROOC210
C     *** INITIALIZE PROGRAM CONSTANTS                                   CEROOC220
      CO   =  2.9979 25E08                                               CEROOC230
      N    =  1.000268E00                                                CEROOC240
      MU   =  1.256E-06                                                  CEROOC250
      NUO  =  2.85E09                                                    CEROOC260
      Q    =  1.94E-12                                                   CEROOC270
      E    =  1.6E-11                                                    CEROOC280
      MO   =  9.10953E-31                                                CEROOC290
      B    =  .0024E00                                                   CEROOC300
C                                                                        CEROOC310
C     *** ARE PROGRAM CONSTANTS OK?                                      CEROOC320
 10   WRITE(6,900) CO,N,MU,NUO,Q,E,MO,B                                  CEROOC330
      READ(5,901) IANS                                                   CEROOC340
      IF (IANS.EQ.INO) GO TO 40                                          CEROOC350
C     *** NO, PROGRAM CONSTANTS NEED TO BE CHANGED                       CEROOC360
      WRITE(6,902)                                                       CEROOC370
      READ(5,903) IANS                                                   CEROOC380
C                                                                        CEROOC390
      IF(IANS.NE.ICO) GO TO 11                                           CEROOC400
         WRITE(6,904) IANS                                               CEROOC410
         READ(5,*) CO                                                    CEROOC420
         GO TO 10                                                        CEROOC430
C                                                                        CEROOC440
 11   IF(IANS.NE.IN) GO TO 12                                            CEROOC450
         WRITE (6,904) IANS                                              CEROOC460
         READ (5,*) N                                                    CEROOC470
         GO TO 10                                                        CEROOC480
```

```
C                                                                       CEROC490
 12       IF(IANS.NE.IMU) GO TO 13                                      CEROC500
             WRITE (6,904) IANS                                         CEROC510
             READ  (5,*) MU                                             CEROC520
             GO TO 10                                                   CEROC530
C                                                                       CEROC540
 13       IF(IANS.NE.INUO) GO TO 14                                     CEROC550
             WRITE (6,904) IANS                                         CEROC560
             READ (5,*) NUO                                             CEROC570
             GO TO 10                                                   CEROC580
C                                                                       CEROC590
 14       IF(IANS.NE.IQ) GO TO 15                                       CEROC600
             WRITE (6,904) IANS                                         CEROC610
             READ (5,*) Q                                               CEROC620
             GO TO 10                                                   CEROC630
C                                                                       CEROC640
 15       IF(IANS.NE.IE) GO TO 16                                       CEROC650
             WRITE (6,904) IANS                                         CEROC660
             READ (5,*) E                                               CEROC670
             GO TO 10                                                   CEROC680
C                                                                       CEROC690
 16       IF(IANS.NE.IMO) GO TO 17                                      CEROC700
             WRITE (6,904) IANS                                         CEROC710
             READ (5,*) MO                                              CEROC720
             GO TO 10                                                   CEROC730
C                                                                       CEROC740
 17       IF(IANS.NE.IB) GO TO 18                                       CEROC750
             WRITE (6,904) IANS                                         CEROC760
             READ (5,*) B                                               CEROC770
             GO TO 10                                                   CEROC780
                                                                        CEROC790
C            *** ERROR                                                  CEROC800
 18           WRITE(6,910)                                              CEROC810
              GO TO 10                                                  CEROC820
C                                                                       CEROC830
 40   WRITE(6,905)                                                      CEROC840
      READ(5,*) HARM(1),HARM(2),HARM(3),HARM(4),HARM(5)                 CEROC850
      WRITE(6,906)                                                      CEROC860
      READ(5,*) CELL(1),CELL(2),CELL(3),CELL(4),CELL(5)                 CEROC870
C                                                                       CEROC880
      WRITE(6,907)                                                      CEROC890
      DO 41 I = 1,20                                                    CEROC900
         READ(5,*) POWER(I)                                             CEROC910
 41   CONTINUE                                                          CEROC920
C                                                                       CEROC930
      DO 42 I = 1,20                                                    CEROC940
         THETAP(I) = I                                                  CEROC950
 42   CONTINUE                                                          CEROC960
```

```
C                                                                       CER0C570
C                                                                       CER0C580
C       CALL TEK618                                                     CER0C590
C       CALL PTEKAL                                                     CER01C00
C       CALL PRTPLT(72,6)                                               CER01C10
C       CALL VRSTEC(0,0,0)                                              CER01C20
        CALL CCMPRS                                                     CER01C30
C                                                                       CER01C40
C       CALL NCERDR                                                     CER01C50
        CALL PAGE(8.5,11.0)                                             CER01C60
C                                                                       CER01C70
C   THE LCCATICN CF THE ORIGIN:                                         CER01C80
C       CALL PHYSOR(1.0,1.0)                                            CER01C90
C                                                                       CER01100
C   THE AREA IN INCHES BY INCHES:                                       CER01110
        CALL AREA2D(7.0,10.0)                                           CER01120
C                                                                       CER01130
C   WHATEVER LABELS DESIRED ON X AND Y AXIS:                            CER01140
        CALL XNAME ('ANGLE $',100)                                      CER01150
        CALL YAXANG(0)                                                  CER01160
        CALL YNAME ('POWER/STERADIAN (WATTS) $',100)                    CER01170
C                                                                       CER01180
C   WHATEVER HEADING DESIRED FCR GRAPH:                                 CER01190
C       CALL HEADIN('THIS IS A HEADING$',100,1.2,2)                     CER01200
C       CALL HEADIN('HEADING ON NEXT LINE$',100,1.2,2)                  CER01210
C                                                                       CER01220
C   RANGE AND INCREMENTS CF X AND RANGE AND INCREMENTS OF Y             CER01230
        CALL GRAF (0.0, 5.0,15.0, 0.0, .01,0.15)                        CER01240
C                                                                       CER01250
C                                                                       CER01260
C   NEED SPLINE FOR SMOOTH FIT (OTHERWISE GET LINEAR FIT)               CER01270
C       CALL SPLINE                                                     CER01280
 45     DO 70 J = 1,5                                                   CER01290
          IF (HARM(J).EQ.0) GO TO 70                                    CER01300
C                                                                       CER01310
 50       DO 75 K = 1,5                                                CER01320
            IF (CELL(K).EQ.0) GO TO 70                                  CER01330
C                                                                       CER01340
C         *** BEGIN CALCULATIONS                                        CER01350
            C = CO / N                                                  CER01360
            GAMMA = E / (MO*CO*CO)                                      CER01370
            BETA = (1.0 - 1.0 / (GAMMA*GAMMA) ) ** 0.5                  CER01380
            V = BETA * CO                                               CER01390
            COSTC  = C / V                                              CER01400
            C1 = MU*C*NUC*NUO*Q*Q / (8.0*PI*PI)                         CER01410
            KAY = 2.0*PI*HARM(J)*NUO / C                                CER01420
C                                                                       CER01430
            WRITE(50,*) KAY,COSTC,HARM(J), CELL(K)                      CER01440
```

```
C                                                                       CER01450
C        *** CALCULATE FUNCTIONAL VALUES                                CER01460
            RADF = THETAF * DGTORD                                      CER01470
            XPOINT = FLOAT(NPOINT-1)                                    CER01480
            DO 80 I=1,NPOINT                                            CER01490
              RATIO = FLOAT(I-1) / XPOINT                               CER01500
              ANGLE = RATIO * RADF                                      CER01510
              THETA(I) = RATIO * THETAF                                 CER01520
              F = 1/(EXP(0.25 *  B*KAY*COS(ANGLE) * B*KAY*COS(ANGLE) )) CER01530
              U =(KAY * CELL(K) * (COSTC-COS(ANGLE)))/2                 CER01540
              IF = SIN(U) / U                                           CER01550
              W(I) =  C1 * (F*KAY*CELL(K)*SIN(ANGLE)*IF)**2             CER01560
C                                                                       CER01570
              WRITE(50,*) W(I),THETA(I),F,IF                            CER01580
C                                                                       CER01590
 80           CONTINUE                                                  CER01600
C                                                                       CER01610
C  CALL CURVE FOR EACH CURVE DESIRED (0 IN LAST PARAMETER               CER01620
C  INDICATES DO NOT DISPLAY DATA POINTS, 1 MEANS DISPLAY                CER01630
C  EVERY DATA POINT)                                                    CER01640
      CALL CURVE (THETA,W,NPOINT,0)                                     CER01650
C     CALL CURVE (X,Y,N,0)                                              CER01660
C     CALL CURVE (X,YY,N,0)                                             CER01670
C                                                                       CER01680
 75      CONTINUE                                                       CER01690
C                                                                       CER01700
 70   CONTINUE                                                          CER01710
C                                                                       CER01720
      CALL CURVE (THETAP,POWER,20,-1)                                   CER01730
C                                                                       CER01740
      CALL ENDPL(0)                                                     CER01750
C                                                                       CER01760
C     ** USER WANT ANOTHER RUN?                                         CER01770
        WRITE(6,908)                                                    CER01780
        READ(5,901) IANS                                                CER01790
        IF(IANS.EQ.IY) GO TO 10                                         CER01800
      CALL DONEPL                                                       CER01810
 90   CONTINUE                                                          CER01820
      STOP                                                              CER01830
C                                                                       CER01840
900   FORMAT(/,' PROGRAM CONSTANTS CURRENTLY HAVE VALUES AS FOLLOWS:',/ CER01850
     * ,5X,'CC  =  SPEED OF LIGHT IN VACUUM      =',E14.7,/            CER01860
     * ,5X,'N   =  AIR REFRACTIVE INDEX          =',E14.7,/            CER01870
     * ,5X,'ML  =  PERMEABILITY OF AIR           =',E14.7,/            CER01880
     * ,5X,'NLO =  BUNCH FREQUENCY               =',E14.7,/            CER01890
     * ,5X,'Q   =  ELECTRON CHARGE               =',E14.7,/            CER01900
     * ,5X,'E   =  ELECTRON ENERGY               =',E14.7,/            CER01910
     * ,5X,'MC  =  ELECTRON REST MASS            =',E14.7,/            CER01920
```

```
     * ,5X,'B    =  BUNCH SIZE PARAMETER                =',E14.7,//                CER01930
     * ,' DO YOU WANT TO CHANGE ANY OF THESE VALUES? ( Y OR N )')                     CER01940
     *                                                                               CER01950
901   FORMAT(A1)                                                                     CER01960
902   FORMAT(/,' ENTER CONSTANT TO BE CHANGED:')                                     CER01970
903   FORMAT(A4)                                                                     CER01980
904   FORMAT(' ENTER NEW VALUE FOR ',A4,':')                                         CER01990
905   FORMAT(' ENTER VALUES FOR HARM (HARMONIC OF BUNCH FREQUENCY):')                CER02000
906   FORMAT(' ENTER VALUES FOR CELL (LENGTH OF EMISSION REGION):')                  CER02010
907   FORMAT(' ENTER EXPERIMENTAL VALUES FOR POWER:')                                CER02020
908   FORMAT(' WANT ANOTHER RUN? ( ENTER Y OR N )')                                  CER02030
910   FORMAT(' THE VARIABLE SELECTED IS NOT IN THE LIST - TRY AGAIN')                CER02040
      END
```

APPENDIX C

FORTRAN PROGRAM - SUM OF CERENKOV CURVES WITH DATA POINTS

This is an interactive program which calculates and plots a single Cerenkov radiation curve and superimposes a single set of data points over the curve. The single Cerenkov curve will represent a sum of curves. The sum will be composed of each distinct combination of harmonic and path length chosen. Up to five different lengths of emission path and five different harmonics of the bunch frequency may be chosen. The program also allows adjustment of all basic parameters and constants of the Cerenkov power equation. The program will prompt for 20 data measurements of power (one for each degree of angle).

```
C     THIS PROGRAM CALCULATES AND PLOTS A SUM OF CERENKOV RADIATION        SUMOCC10
C     CURVES.  UP TO FIVE HARMONICS AND FIVE LENGTHS OF EMISSION REGION    SUMOCC20
C     MAY BE CHOSEN; THE PROGRAM WILL INCLUDE A DIFFERENT CURVE IN THE SUMSUMOCC30
C     FOR EACH DISTINCT COMBINATION OF LENGTH AND HARMONIC.  THE PROGRAM   SUMOCC40
C     THEN ASKS FOR 20 DATA POINTS (ONE PER DEGREE) TO BE SUPERIMPOSED     SUMOCC50
C     OVER THE CURVE.                                                      SUMOCC60
C                                                                          SUMOCC70
      REAL N, MU, KAY, MO, NUO, IF,B,C,GAMMA,BETA,V,COSTC,                 SUMOCC80
     *                  C1,U,F,CO,N,MU,NUO,Q,E,MO,E                      SUMOCC90
      DIMENSION W(1000), THETA(1000), HARM(5), CELL (5), THETAP(20),       SUMOC100
     *          POWER(20), SUM(1000)                                       SUMOC110
C                                                                          SUMOC120
C     INITIALIZE CONSTANTS                                                 SUMOC130
      DATA ICO/'CO  '/,IN/'N   '/,IMU/'MU  '/,INUO/'NUO '/,                SUMOC140
     *     IQ/'Q   '/,IE/'E   '/,IMO/'MO  '/,IB/'B   '/,IY/'Y'/,INO/'N'/   SUMOC150
      NPOINT = 101                                                         SUMOC160
      THETAF = 20.0                                                        SUMOC170
      PI = 3.14159265359                                                   SUMOC180
      DGTORD = 0.01745329251994                                            SUMOC190
      RDTODG = 57.29577951308                                              SUMOC200
C                                                                          SUMOC210
C     *** INITIALIZE PROGRAM CONSTANTS                                     SUMOC220
      CO  =  2.997925E08                                                   SUMOC230
      N   =  1.000268E00                                                   SUMOC240
      MU  =  1.256E-06                                                     SUMOC250
      NUO =  2.85E09                                                       SUMOC260
      Q   =  1.94E-12                                                      SUMOC270
      E   =  1.6E-11                                                       SUMOC280
      MO  =  9.10953E-31                                                   SUMOC290
      B   =  .0024E00                                                      SUMOC300
C                                                                          SUMOC310
C     *** ARE PROGRAM CONSTANTS OK?                                        SUMOC320
 10   WRITE(6,900) CO,N,MU,NUO,Q,E,MO,B                                    SUMOC330
      READ(5,901) IANS                                                     SUMOC340
      IF (IANS.EQ.INO) GO TO 40                                            SUMOC350
C     *** NO, PROGRAM CONSTANTS NEED TO BE CHANGED                         SUMOC360
      WRITE(6,902)                                                         SUMOC370
      READ(5,903) IANS                                                     SUMOC380
C                                                                          SUMOC390
      IF(IANS.NE.ICO) GO TO 11                                             SUMOC400
         WRITE(6,904) IANS                                                 SUMOC410
         READ(5,*) CO                                                      SUMOC420
         GO TO 10                                                          SUMOC430
C                                                                          SUMOC440
 11   IF(IANS.NE.IN) GO TO 12                                              SUMOC450
         WRITE (6,904) IANS                                                SUMOC460
         READ (5,*) N                                                      SUMOC470
         GO TO 10                                                          SUMOC480
```

```
C                                                                       SUMOC490
 12       IF(IANS.NE.IMU) GO TO 13                                      SUMOC500
             WRITE (6,904) IANS                                         SUMOC510
             READ  (5,*) MU                                             SUMOC520
             GO TO 10                                                   SUMOC530
C                                                                       SUMOC540
 13       IF(IANS.NE.INUO) GO TO 14                                     SUMOC550
             WRITE (6,904) IANS                                         SUMOC560
             READ (5,*) NUO                                             SUMOC570
             GO TO 10                                                   SUMOC580
C                                                                       SUMOC590
 14       IF(IANS.NE.IQ) GO TO 15                                       SUMOC600
             WRITE (6,904) IANS                                         SUMOC610
             READ (5,*) C                                               SUMOC620
             GO TO 10                                                   SUMOC630
C                                                                       SUMOC640
 15       IF(IANS.NE.IE) GO TO 16                                       SUMOC650
             WRITE (6,904) IANS                                         SUMOC660
             READ (5,*) E                                               SUMOC670
             GO TO 10                                                   SUMOC680
C                                                                       SUMOC690
 16       IF(IANS.NE.IMO) GO TO 17                                      SUMOC700
             WRITE (6,904) IANS                                         SUMOC710
             READ (5,*) MO                                              SUMOC720
             GO TO 10                                                   SUMOC730
C                                                                       SUMOC740
 17       IF(IANS.NE.IB) GO TO 18                                       SUMOC750
             WRITE (6,904) IANS                                         SUMOC760
             READ (5,*) B                                               SUMOC770
             GO TO 10                                                   SUMOC780
                                                                        SUMOC790
C        *** ERROR                                                      SUMOC800
 18          WRITE(6,910)                                               SUMOC810
             GO TO 10                                                   SUMOC820
C                                                                       SUMOC830
 40   WRITE(6,905)                                                      SUMOC840
      READ(5,*) HARM(1),HARM(2),HARM(3),HARM(4),HARM(5)                 SUMOC850
      WRITE(6,906)                                                      SUMOC860
      READ(5,*) CELL(1),CELL(2),CELL(3),CELL(4),CELL(5)                 SUMOC870
C                                                                       SUMOC880
      WRITE(6,907)                                                      SUMOC890
      DO 41 I = 1,20                                                    SUMOC900
         READ(5,*) POWER(I)                                             SUMOC910
 41   CONTINUE                                                          SUMOC920
C                                                                       SUMOC930
      DO 42 I = 1,20                                                    SUMOC940
         THETAP(I) = I                                                  SUMOC950
 42   CONTINUE                                                          SUMOC960
```

```
C                                                                       SUM00970
C                                                                       SUM00980
C     CALL TEK618                                                       SUM00990
C     CALL PTEKAL                                                       SUM01000
C     CALL PRTPLT(72,6)                                                 SUM01010
C     CALL VRSTEC(0,0,0)                                                SUM01020
      CALL COMPRS                                                       SUM01030
C     CALL NCERDR                                                       SUM01040
      CALL PAGE(8.5,11.0)                                               SUM01050
C                                                                       SUM01060
C  THE LOCATION OF THE ORIGIN:                                          SUM01070
C     CALL PHYSOR(1.0,1.0)                                              SUM01080
C                                                                       SUM01090
C  THE AREA IN INCHES BY INCHES:                                        SUM01100
      CALL AREA2D(7.0,10.0)                                             SUM01110
C                                                                       SUM01120
C  WHATEVER LABELS DESIRED ON X AND Y AXIS:                             SUM01130
      CALL XNAME ('ANGLE $',100)                                        SUM01140
      CALL YNAME ('POWER/STERADIAN (WATTS) $',100)                      SUM01150
      CALL YAXANG (0)                                                   SUM01160
C                                                                       SUM01170
C  WHATEVER HEADING DESIRED FOR GRAPH:                                  SUM01180
C     CALL HEADIN('THIS IS A HEADING$',100,1.2,2)                       SUM01190
C     CALL HEADIN('HEADING ON NEXT LINE$',100,1.2,2)                    SUM01200
C                                                                       SUM01210
C  RANGE AND INCREMENTS OF X AND RANGE AND INCREMENTS OF Y              SUM01220
      CALL GRAF (0.0, 5.0,15.0, 0.0,0.05,0.30)                          SUM01230
C                                                                       SUM01240
C                                                                       SUM01250
C  NEED SPLINE FOR SMOOTH FIT (OTHERWISE GET LINEAR FIT)                SUM01260
C     CALL SPLINE                                                       SUM01270
C                                                                       SUM01280
      DO 69 I = 1,NPOINT                                                SUM01290
         SUM(I) = 0                                                     SUM01300
 69   CONTINUE                                                          SUM01310
C                                                                       SUM01320
 45   DO 70 J = 1,5                                                     SUM01330
         IF (HARM(J).EQ.0) GO TO 70                                     SUM01340
C                                                                       SUM01350
 50      DO 75 K = 1,5                                                  SUM01360
            IF (CELL(K).EQ.0) GO TO 70                                  SUM01370
C                                                                       SUM01380
C        *** BEGIN CALCULATIONS                                         SUM01390
            C = CO / N                                                  SUM01400
            GAMMA = E / (MO*CO*CO)                                      SUM01410
            BETA = (1.0 - 1.0 / (GAMMA*GAMMA) ) ** 0.5                  SUM01420
            V = BETA * CO                                               SUM01430
            CCSTC  = C / V                                              SUM01440
```

```
            C1 = MU*C*NUO*NUO*Q*C / (8.0*PI*PI)                                  SUM01450
            KAY = 2.0*PI*HARM(J)*NUO / C                                         SUM01460
C                                                                                SUM01470
            WRITE(50,*) KAY,COSTC,HARM(J), CELL(K)                               SUM01480
C                                                                                SUM01490
C       *** CALCULATE FUNCTIONAL VALUES                                          SUM01500
            RADF = THETAF * DGTORD                                               SUM01510
            XPCINT = FLOAT(NPOINT-1)                                             SUM01520
            DO 80 I=1,NPCINT                                                     SUM01530
              RATIO = FLOAT(I-1) / XPOINT                                        SUM01540
              ANGLE = RATIO * RADF                                               SUM01550
              THETA(I) = RATIO * THETAF                                          SUM01560
              F = 1/(EXP(0.25 * B*KAY*COS(ANGLE) * B*KAY*COS(ANGLE) ))          SUM01570
              U =(KAY * CELL(K) * (COSTC-COS(ANGLE)))/2                          SUM01580
              IF = SIN(U) / U                                                    SUM01590
              W(I) =  C1 * (F*KAY*CELL(K)*SIN(ANGLE)*IF)**2                      SUM01600
              SUM(I) = W(I) + SUM(I)                                             SUM01610
              WRITE(50,*) SUM(I),THETA(I)                                        SUM01620
C                                                                                SUM01630
C             WRITE(50,*) W(I),THETA(I),F,IF                                     SUM01640
C                                                                                SUM01650
 80           CONTINUE                                                           SUM01660
C                                                                                SUM01670
C  CALL CURVE FOR EACH CURVE DESIRED (0 IN LAST PARAMETER                        SUM01680
C  INDICATES DO NOT DISPLAY DATA POINTS, 1 MEANS DISPLAY                         SUM01690
C  EVERY DATA POINT)                                                             SUM01700
C     CALL CURVE (THETA,W,NPOINT,0)                                              SUM01710
C     CALL CURVE (X,Y,N,0)                                                       SUM01720
C     CALL CURVE (X,YY,N,0)                                                      SUM01730
C                                                                                SUM01740
 75      CONTINUE                                                                SUM01750
C                                                                                SUM01760
 70   CONTINUE                                                                   SUM01770
C                                                                                SUM01780
      CALL CURVE (THETA,SUM,NPOINT,0)                                            SUM01790
      CALL CURVE (THETAP,POWER,20,-1)                                            SUM01800
C                                                                                SUM01810
      CALL ENDPL(0)                                                              SUM01820
C                                                                                SUM01830
C     ** USER WANT ANOTHER RUN?                                                  SUM01840
         WRITE(6,908)                                                            SUM01850
         READ(5,901) IANS                                                        SUM01860
         IF(IANS.EQ.IY) GO TO 10                                                 SUM01870
      CALL DONEPL                                                                SUM01880
 90   CONTINUE                                                                   SUM01890
      STOP                                                                       SUM01900
C                                                                                SUM01910
 900  FORMAT(/,' PROGRAM CONSTANTS CURRENTLY HAVE VALUES AS FOLLOWS:',/          SUM01920
```

```
     *  ,5X,'CC   =  SPEED OF LIGHT IN VACUUM      =',E14.7,/                SUM01S30
     *  ,5X,'N    =  AIR REFRACTIVE INDEX          =',E14.7,/                SUM01S40
     *  ,5X,'ML   =  PERMEABILITY OF AIR           =',E14.7,/                SUM01S50
     *  ,5X,'NLO =  BUNCH FREQUENCY                =',E14.7,/                SUM01S60
     *  ,5X,'Q    =  ELECTRON CHARGE               =',E14.7,/                SUM01S70
     *  ,5X,'E    =  ELECTRON ENERGY               =',E14.7,/                SUM01S80
     *  ,5X,'MO   =  ELECTRON REST MASS            =',E14.7,/                SUM01S90
     *  ,5X,'B    =  BUNCH SIZE PARAMETER          =',E14.7,//               SUM02C00
     *  ' DO YOU WANT TO CHANGE ANY OF THESE VALUES? ( Y OR N )')            SUM02C10
  901  FORMAT(A1)                                                           SUM02C20
  902  FORMAT(/,' ENTER CONSTANT TO BE CHANGED:')                           SUM02C30
  903  FORMAT(A4)                                                           SUM02C40
  904  FORMAT(' ENTER NEW VALUE FOR ',A4,':')                              SUM02C50
  905  FORMAT(' ENTER VALUES FOR HARM (HARMONIC OF BUNCH FREQUENCY):')      SUM02C60
  906  FORMAT(' ENTER VALUES FOR CELL (LENGTH OF EMISSION REGION):')        SUM02C70
  907  FORMAT(' ENTER EXPERIMENTAL VALUES FOR POWER:')                      SUM02C80
  908  FORMAT(' WANT ANOTHER RUN? ( ENTER Y OR N )')                        SUM02C90
  910  FORMAT(' THE VARIABLE SELECTED IS NOT IN THE LIST - TRY AGAIN')      SUM02100
       END                                                                  SUM02110
```

APPENDIX D
EXPERIMENTAL APPARATUS

This appendix contains photographs of the experimental apparatus used in this experiment. Figure D.1 shows the end station of the LINAC. At the right is the LINAC beam aperture, with the reflecting aluminum mirror at the left. The detector assembly, mounted at the end of the pivot arm, is shown in the foreground of the photograph. Also shown, located along the beam path between the aperture and the mirror, is a small portable laser used to align the mirror.

Figure D.2 shows the waveguide filter with the fin-line insert for one of the harmonics, along with the detector and horn. Figure D.3 shows the detector apparatus assembled.

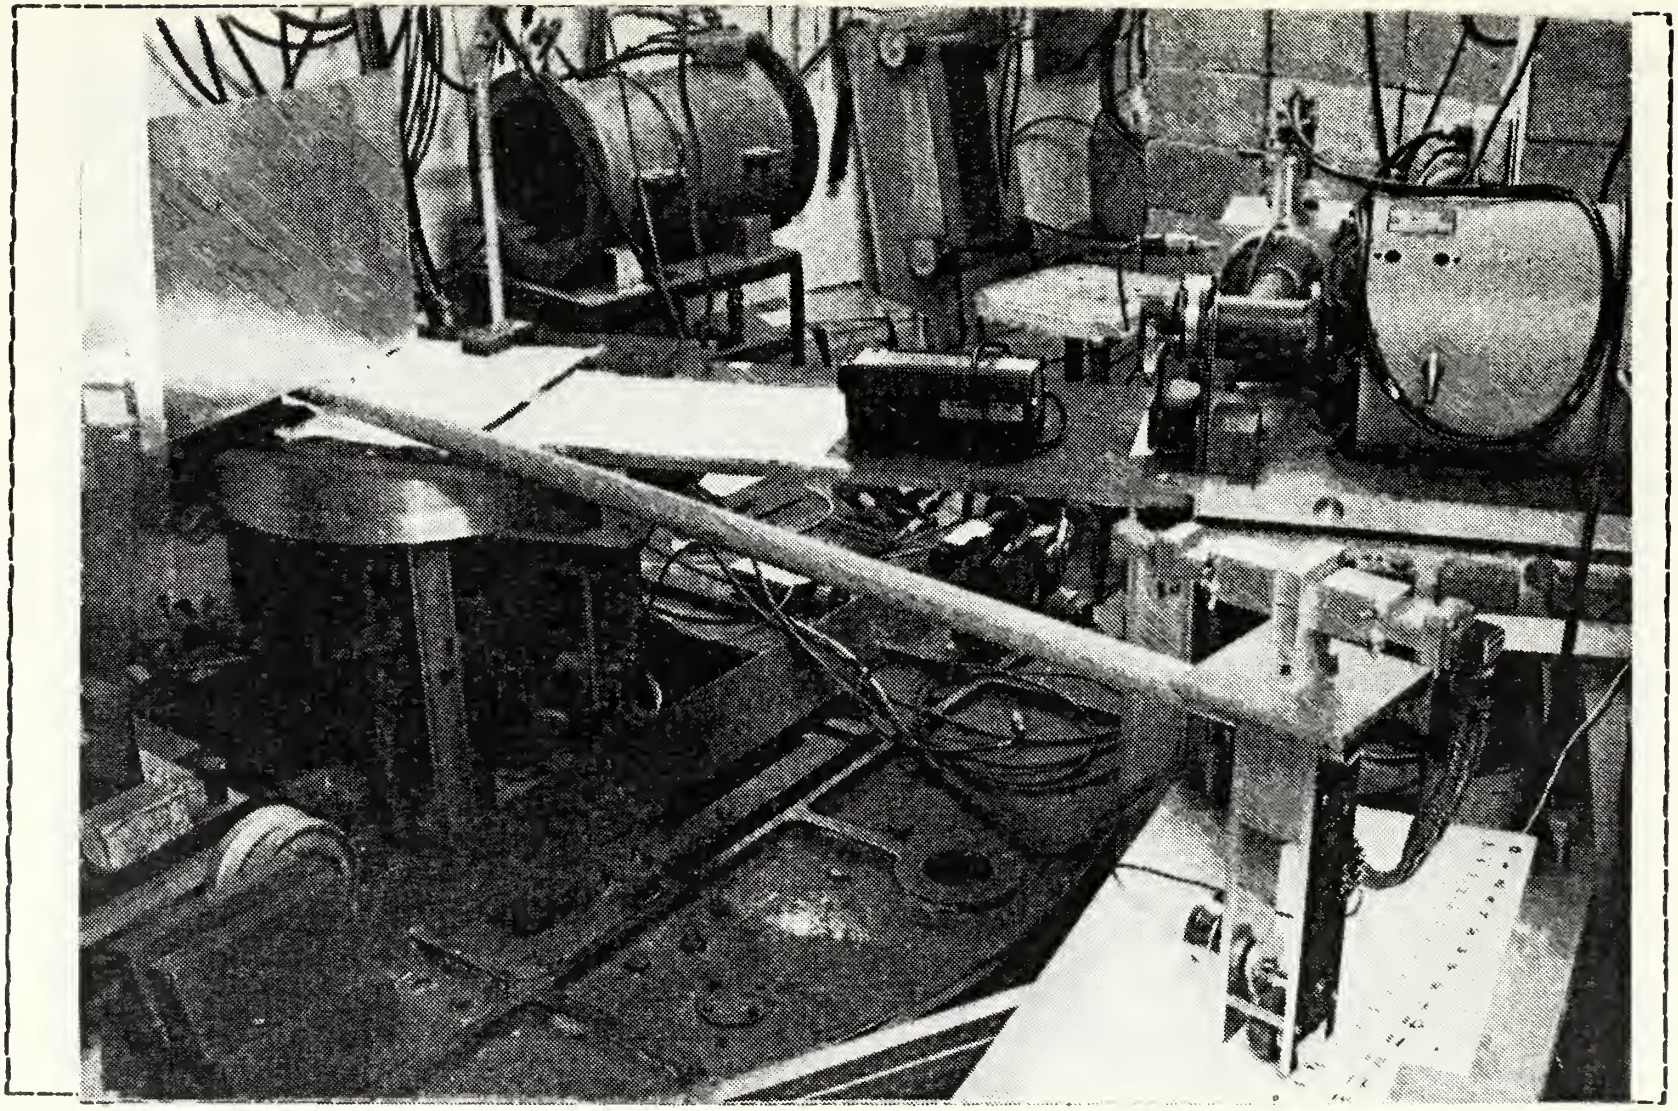

Figure D.1 LINAC End-Station.

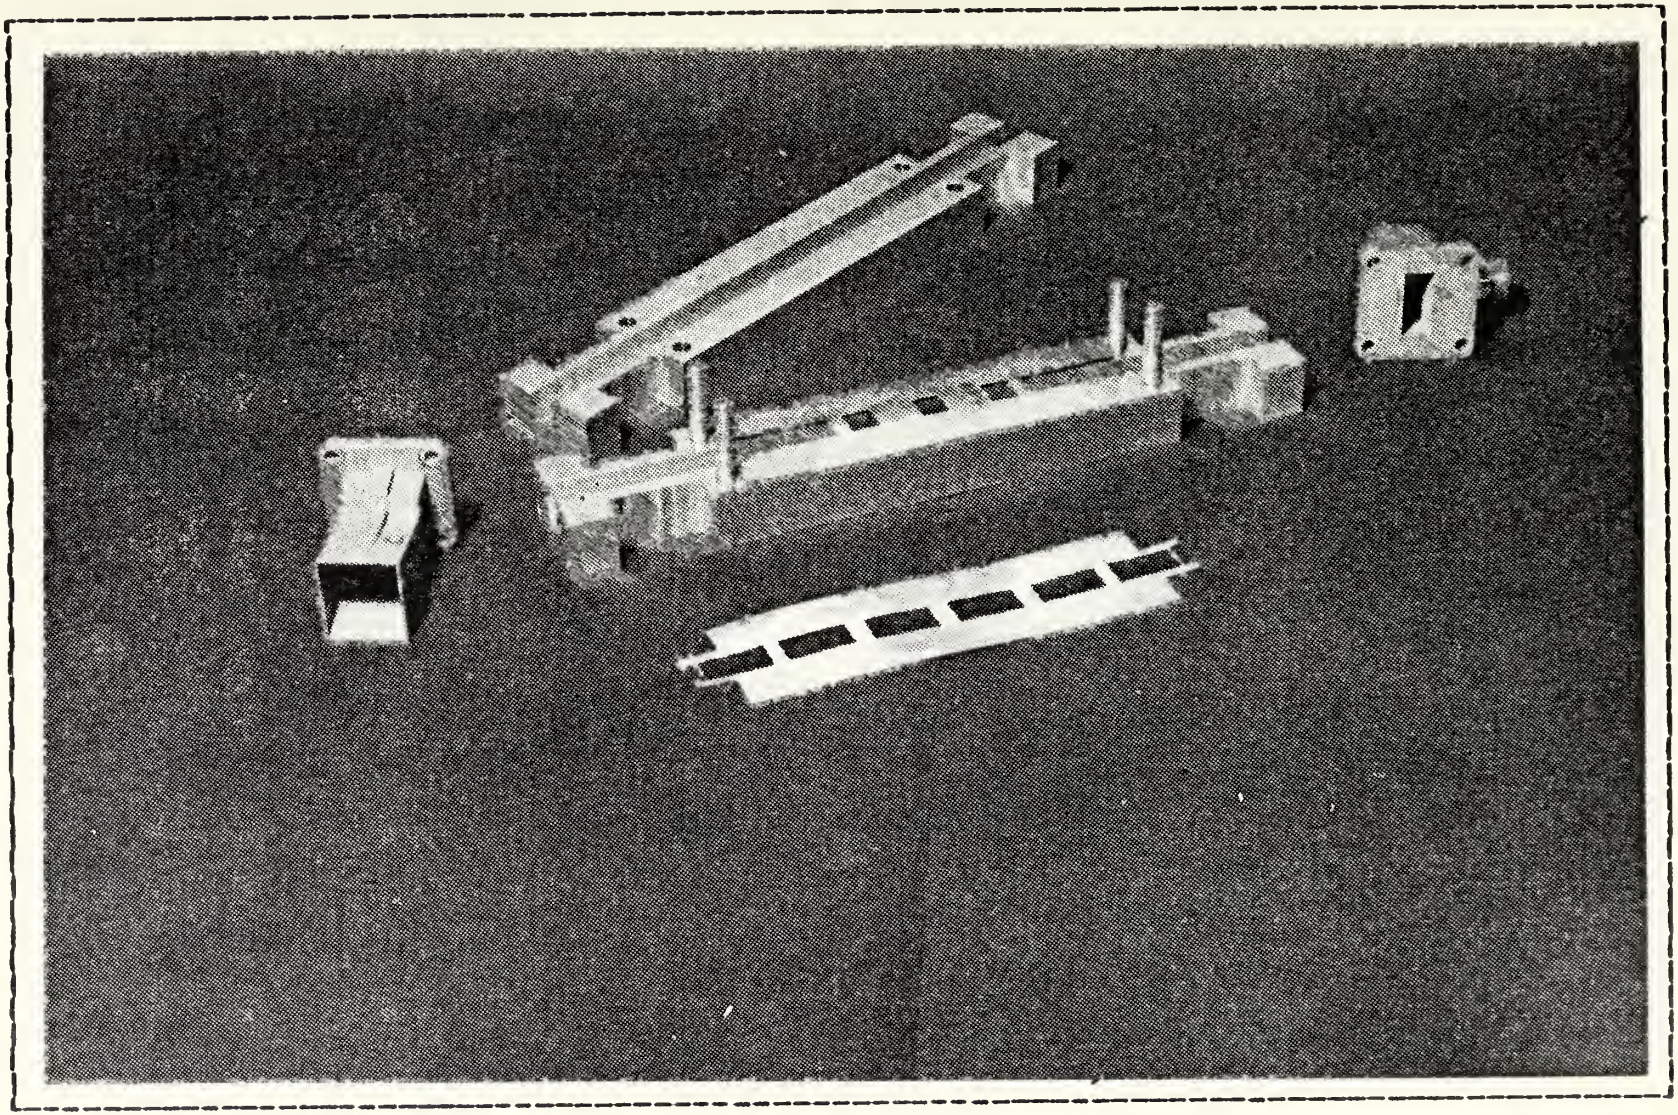

Figure D.2 Detection Apparatus Components.

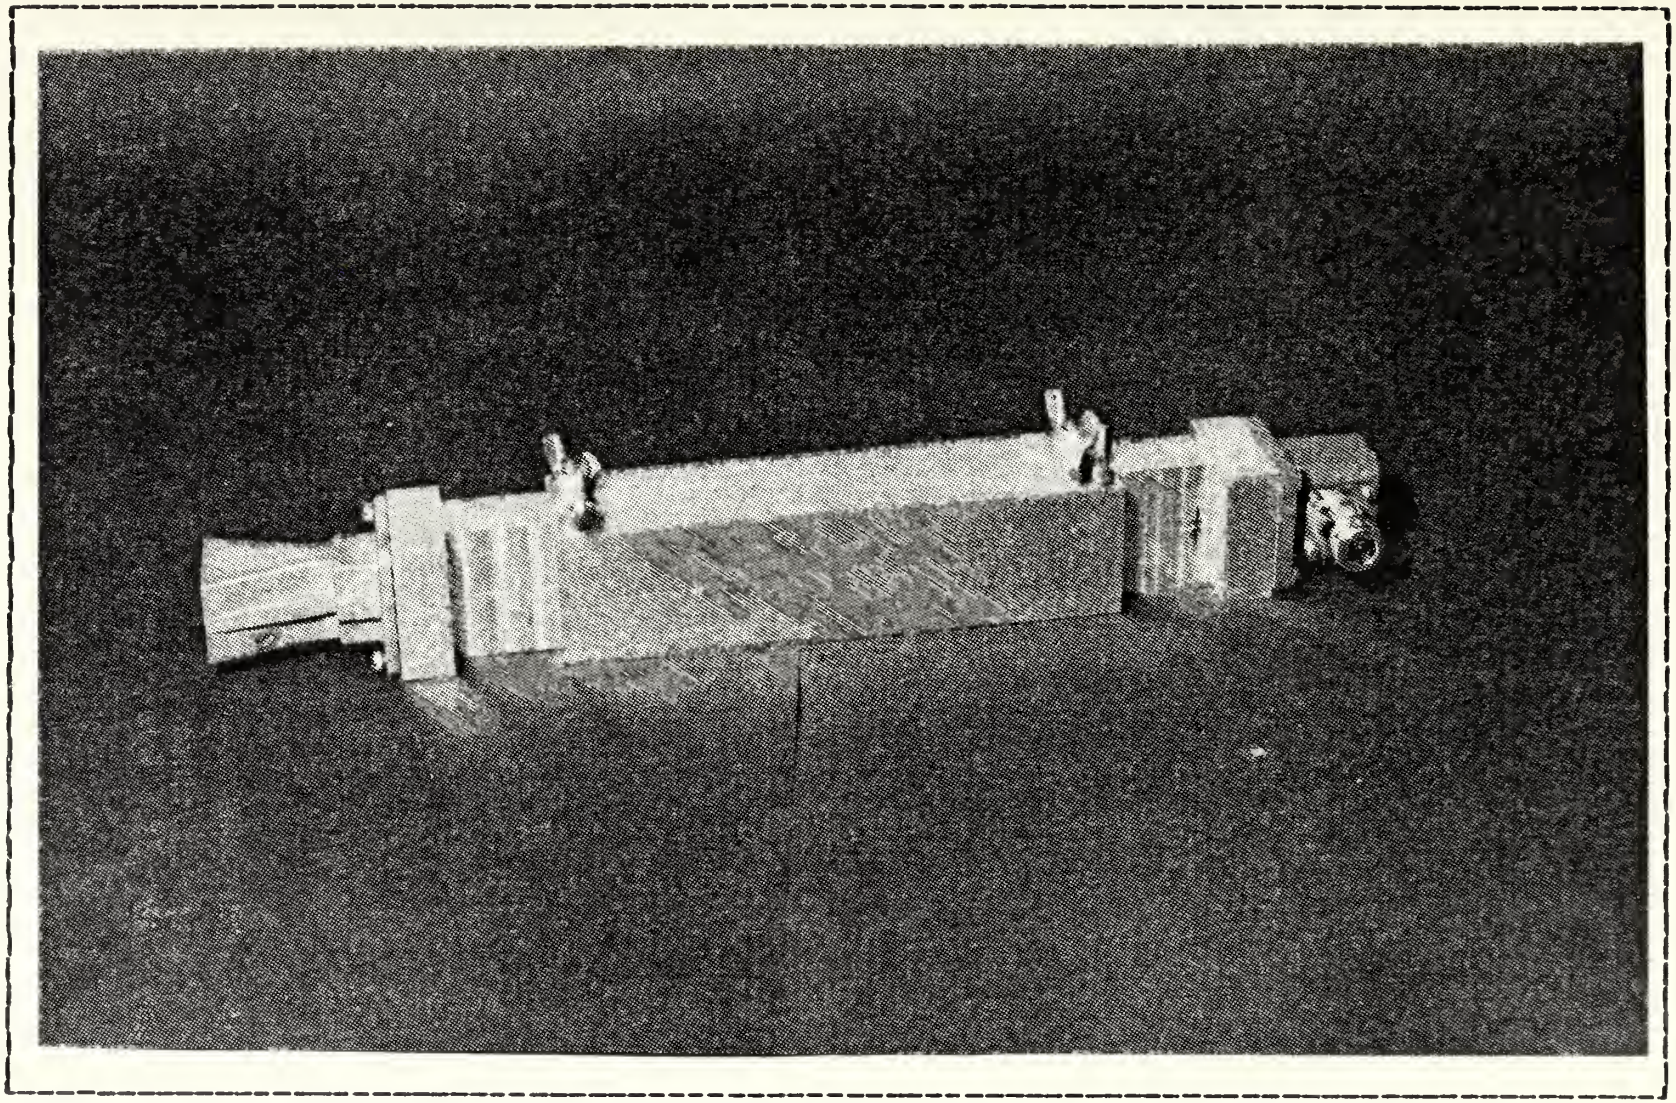

Figure D.3 Assembled Detection Apparatus.

APPENDIX E

TABULAR DATA FOR FIGURES

TABLE III

Tabular Data for Figure 3.1

Degree	Channel	Normalized Value
1	101	.0082
2	96	.0078
3	188	.0153
4	434	.0352
5	575	.0467
6	864	.0701
7	828	.0672
8	752	.0610
9	610	.0495
10	734	.0596
11	635	.0515
12	609	.0494
13	446	.0362
14	265	.0215
15	152	.0123

-Channel values were read from the Pulse Height Analyzer

-Normalizing factor was 8.1134E-05

-Beam current = 4.0E-08 Amps

TABLE IV

Tabular Data for Figure 3.2

Degree	Channel	Normalized Value
1	219	.0244
2	114	.0127
3	198	.0221
4	284	.0317
5	556	.0620
6	694	.0774
7	772	.0861
8	786	.0877
9	572	.0638
10	393	.0438
11	304	.0339
12	193	.0215
13	190	.0212
14	64	.0071
15	0	.0000

-Channel values were read from Pulse Height Analyzer

-Normalizing factor was 1.1158E-04

-Beam current = 4.0E-08 Amps

TABLE V

Tabular Data for Figure 3.3

Degree	Channel	Normalized Value
1	117	.0837
2	0	.0000
3	75	.0537
4	207	.1481
5	431	.3083
6	565	.4042
7	623	.4457
8	590	.4221
9	556	.3978
10	442	.3162
11	344	.2461
12	262	.1874
13	210	.1502
14	111	.0794
15	109	.0780

-Channel values were read from Pulse Height Analyzer

-Normalizing Factcr was 3.9502E-04

-Beam current = 4.0E-08 Amps

TABLE VI

Tabular Data for Figure 3.4

Degree	Channel	Normalized Value
1	117	.0290
2	0	.0000
3	75	.0186
4	207	.0513
5	431	.1069
6	565	.1401
7	623	.1545
8	590	.1463
9	556	.1379
10	442	.1096
11	344	.0853
12	262	.0650
13	210	.0521
14	111	.0275
15	109	.0270

-Channel Values were read from the Pulse Height Analyzer

-Normalizing factor was 2.48E-04

-Beam current = 4.0E-08 Amps

TABLE VII

Tabular Data for Figure 3.5

Degree	Channel	Normalized Value
1	101	.0190
2	96	.0180
3	188	.0353
4	434	.0815
5	575	.1080
6	864	.1623
7	828	.1555
8	752	.1413
9	610	.1146
10	734	.1379
11	635	.1193
12	609	.1144
13	446	.0838
14	265	.0498
15	152	.0286

-Channel values were read from the Pulse Height Analyzer

-Normalizing factor was 1.878E-04

-Beam current = 4.0E-08 Amps

LIST OF REFERENCES

1. Buskirk, F. R. and Neighbours, J. R., "Cerenkov Radiation from Periodic Electron Bunches," Physical Review, v. 28, pp. 1531-1538, September 1983.

2. Naval Postgraduate School, Report Number NPS-61-83-003, Cerenkov Radiation from Bunched Electron Beams, by F. R. Buskirk and J. R. Neighbours, October 1982.

3. Naval Postgraduate School, Report Number NPS-61-83-010, Diffraction Effects in Cerenkov Radiation, by J. R. Neighbours and F. R. Buskirk, June 1983.

4. Saglam, Ahmet, Cerenkov Radiation, Master's Thesis, Naval Postgraduate School, Monterey, 1982.

5. Alexander, K. B., and Hamel, S. R., Design and Analysis of a Generalized Class of Fin-Line Filters, Master's Thesis, Naval Postgraduate School, Monterey, 1983.

6. Collin, R. E., Foundations for Microwave Engineering, Mc-Graw Hill, 1966.

INITIAL DISTRIBUTION LIST

		No. Copies
1.	Defense Technical Information Center Cameron Station Alexandria, Virginia22314	2
2.	Superintendent Attn: Library, Code 0142 Naval Postgraduate School Monterey, Califcrnia 93943	2
3.	Physics Library, Code 61 Department of Physics Naval Postgraduate School Monterey, California 93943	2
4.	Professor F. R. Buskirk, Code 61Bs Department of Physics Naval Postgraduate School Monterey, California 93943	10
5.	Professor J. R. Neighbours, Code 61Nb Department of Physics Naval Postgraduate School Monterey, California 93943	2
6.	Lieutenant Lawrence A. Newton Naval Ship Weapons Systems Engineering Station Port Hueneme, California 93043	2
7.	Dr. Charles M. Huddleston, Code R401 Naval Surface Weapons Center Silver Spring, Missouri 20810	2
8.	Captain Robert Topping PMS 405 Naval Sea Systems Command Washington, D.C. 20362	2

207681

Thesis
N4692 Newton
c.1 Cerenkov radiation generated by periodic electron bunches in a finite air path

3 APR 86
16 NOV 87

30635
33326

207681

Thesis
N4692 Newton
c.1 Cerenkov radiation generated by periodic electron bunches in a finite air path.

AMERICAN BINDERY
TOPEKA KANSAS

thesN4692
Cerenkov radiation generated by periodic
3 2768 001 89950 3
DUDLEY KNOX LIBRARY